

## Troubleshooting Guide

### - mechanical -



*Xperia XA1 Plus*

*G3412, G3416, G3221, G3223, G3226*

## CONTENTS

<b>1</b>	<b>Problem Areas .....</b>	<b>5</b>
1.1	Power .....	5
1.1.1	Will not power on or will switch off randomly.....	5
1.2	Keys .....	7
1.2.1	Back, Menu, Home and Multitask Keys .....	7
1.2.2	Volume Key .....	7
1.2.3	On/Off Key.....	9
1.2.4	Camera Key.....	11
1.3	Touch Screen .....	14
1.3.1	Touch Screen malfunction.....	14
1.4	Display .....	15
1.4.1	Graphics & Illumination .....	15
1.5	LED/Illumination.....	16
1.5.1	LED/Illumination .....	16
1.6	Speaker .....	18
1.6.1	Loudspeaker .....	18
1.7	Earphone .....	21
1.7.1	Ear Speaker.....	21
1.8	Microphone.....	22
1.8.1	Primary Microphone .....	22
1.8.2	Secondary Microphone .....	24
1.9	Vibrator .....	25
1.9.1	Vibrator not generating alerts .....	25
1.10	Camera.....	26
1.10.1	Main Camera .....	26
1.10.2	Video Call Camera defects.....	27
1.11	Flash LED .....	28
1.11.1	Main Camera Flash LED not flashing.....	28
1.12	Bluetooth and WLAN .....	29
1.12.1	Bluetooth or WLAN connection failure.....	29
1.13	NFC .....	30
1.13.1	NFC malfunctions.....	30
1.14	GPS .....	31
1.14.1	GPS malfunctions.....	31
1.15	Compass.....	32
1.15.1	Compass fails .....	32
1.16	Accelerometer .....	33
1.16.1	Accelerometer test fails .....	33
1.17	Gyroscope .....	34
1.17.1	Gyroscope test fails .....	34
1.18	Ambient Light Sensor .....	35
1.18.1	Light Sensor malfunctions .....	35
1.19	Proximity Switch .....	37

1.19.1 Proximity switch malfunctions .....	37
<b>1.20 Hall Sensor .....</b>	<b>39</b>
1.20.1 Hall Sensor test fails .....	39
<b>1.21 Real Time Clock .....</b>	<b>40</b>
1.21.1 Real time clock test fails .....	40
<b>1.22 Total call time .....</b>	<b>41</b>
1.22.1 Total call time fails .....	41
<b>1.23 External Memory .....</b>	<b>42</b>
1.23.1 Memory Card not detected .....	42
<b>1.24 Security.....</b>	<b>43</b>
1.24.1 Security fails .....	43
<b>1.25 FM Radio.....</b>	<b>44</b>
1.25.1 No/Poor FM Radio reception .....	44
<b>1.26 Verify Certificates.....</b>	<b>45</b>
1.26.1 Verify Certificates fails .....	45
<b>1.27 Network &amp; Signal.....</b>	<b>46</b>
1.27.1 No/Poor signal .....	46
<b>1.28 SIM (G3421,G3423).....</b>	<b>50</b>
1.28.1 SIM not detected.....	50
1.28.2 Incorrect Nano SIM indicated .....	50
<b>1.29 SIM (G3412,G3416,G3426) .....</b>	<b>51</b>
1.29.1 SIM not detected.....	51
1.29.2 Incorrect Nano SIM indicated .....	51
<b>1.30 Charging .....</b>	<b>52</b>
1.30.1 Battery will not charge by USB connector .....	52
<b>1.31 Audio Jack.....</b>	<b>55</b>
1.31.1 Connection to headset fails.....	55
<b>1.32 Data Communication .....</b>	<b>56</b>
1.32.1 Data transfer via System Connector fails.....	56
<b>1.33 Fingerprint .....</b>	<b>58</b>
1.33.1 Fingerprint function fails .....	58
<b>2 Revision History .....</b>	<b>60</b>

**For general information about mechanical repair related issues, refer to 1220-1333: Generic Repair Manual – mechanical**


**If there are no special indications of 'G3412, G3416, G3421, G3423 or G3426', G3412, G3416, G3421, G3423 and G3426 share the same repair method as common sections, whose pictures are used with G3426.**

**1309-7255 CS-Everest (Repair -Mechanical- Tools and Equipment (include Repair Software), Info-Center number is RE4251) Calibration or Flashing Customize by Emma or Aged Battery Reset by Emma must be performed when following Reassembly or Replacement.**

		CS-Everest Calibration			Emma
		Proximity Light Sensor G Sensor	Smart Amp	Color ID Flashing	Aged Battery Reset
Reassembly	Main PBA	O			
	Display Cover Assy	O			
	Rubber PL Sensor	O			
Replacement	Main PBA	O	O	O	
	Display Cover Assy	O			
	Rubber PL Sensor	O			
	Battery				O
	Main Antenna Speaker Box		O		

**Note! When performing proximity sensor calibration, put the phone unit on a stable place, facing up, and no any objects within 50cm.**

**Remove the protection film if sensor window is covered by the protection film.**

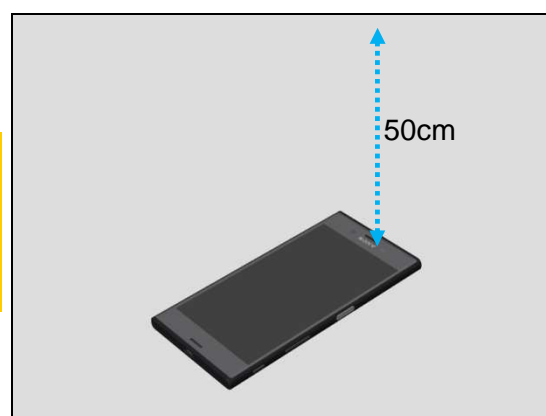

## 1 Problem Areas

### 1.1 Power

#### 1.1.1 Will not power on or will switch off randomly

**Check:**

Check whether the phone vibrates by pressing the on/off key.

**Action:**

1. If activation of the vibrator is detected, but no display, refer to section 1.4 'Display'.

2. If NO activation of the Vibrator is detected and no display by pressing the on/off key, perform a force shut down, press power key and volume up key for 11 seconds and then power on the unit again.

3. If still NO activation of the Vibrator is detected and no display by pressing the on/off key, check that the battery is charging when connected to a charger.




**Follow Test Instruction - mechanical chapter of Charging via Charger or Computer, Diagnostic Battery / Charging status.**

**Check:**

Inspect the on/off key.

**Action:**

Refer to section 1.2.3 'On/Off Key'.

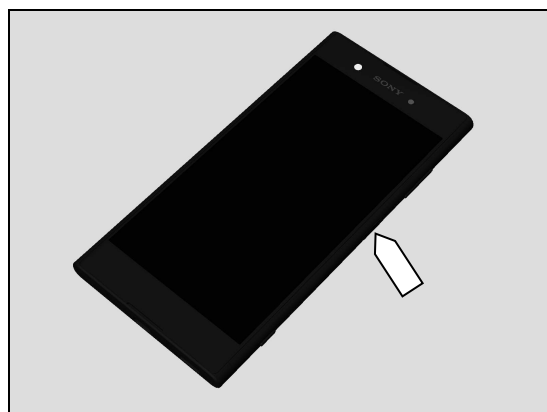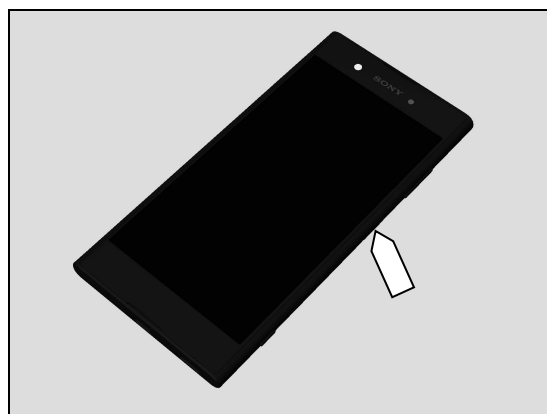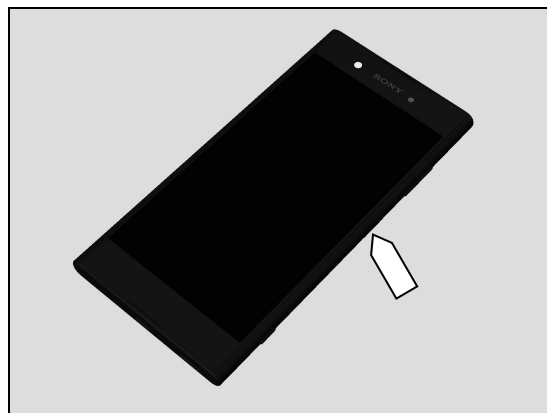



## Problem Areas: Power

**Check:**

Inspect the Battery connector to Main PBA.

**Action:**

1. If not properly connected – disconnect and reconnect it.
2. If dirty or oxidized – clean the both sides of the BtB connector.
3. If the BtB connector, the FPC or the Battery is damaged – replace the Battery.
4. Replace Main PBA.

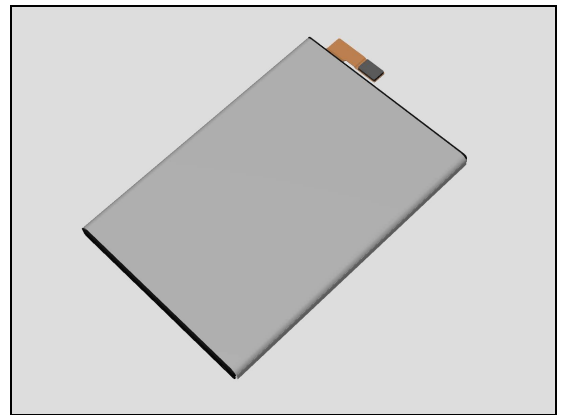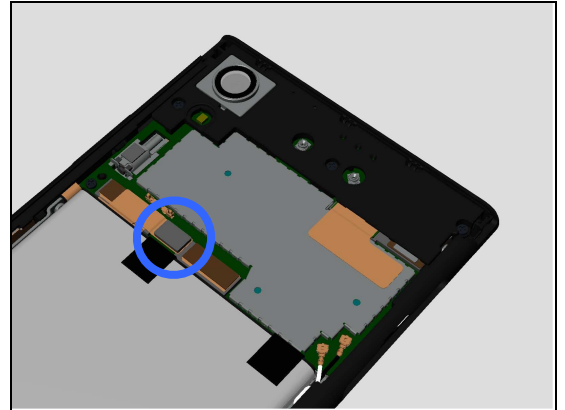


## Problem Areas

### 1.2 Keys

#### 1.2.1 Back, Menu, Home and Multitask Keys

**Action:**

1. Refer to section 1.3 'Touch Screen'.
2. Replace Main PBA.

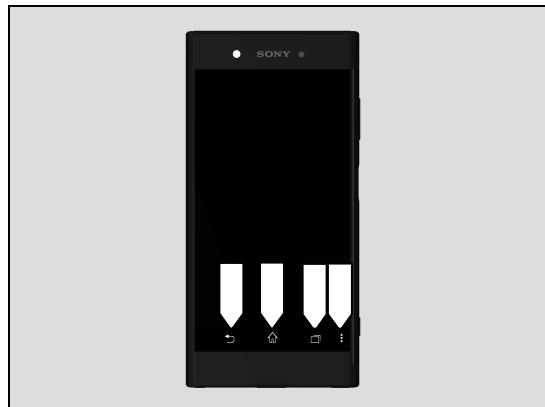


#### 1.2.2 Volume Key

**Check:**

Inspect the external area of the Volume Key.

**Action:**

1. If dirty – clean it.

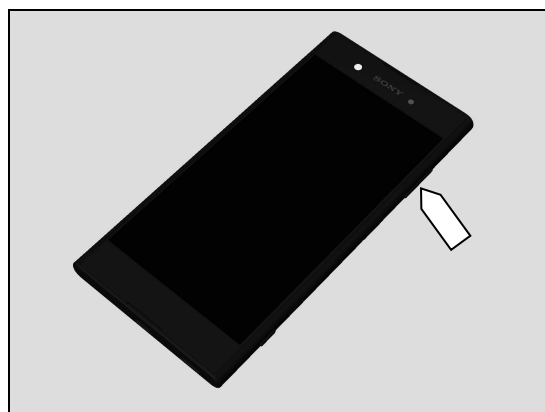

2. If damaged – replace the Key Volume.




**Check:**

Inspect the BtB connector of Sidekey FPC Assy to Main PBA.

**Action:**

1. If not properly connected – disconnect and reconnect it.
2. If dirty or oxidized – clean it.

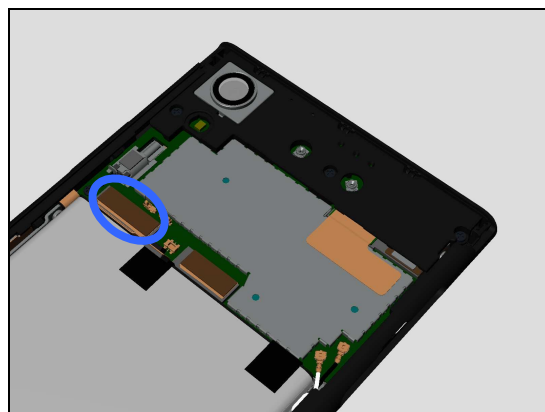

## Problem Areas: Keys

3. If the Sidekey FPC Assy is damaged – replace it.
4. Replace Main PBA.

### Check:




Inspect the condition of Volume Key rubber (a) and Volume Key switch (b).

### Action:

1. If dirty – clean them.

2. If the Volume Key rubber is damaged – replace the Key Volume.

3. If the volume key switch is damaged – replace the Sidekey FPC Assy.

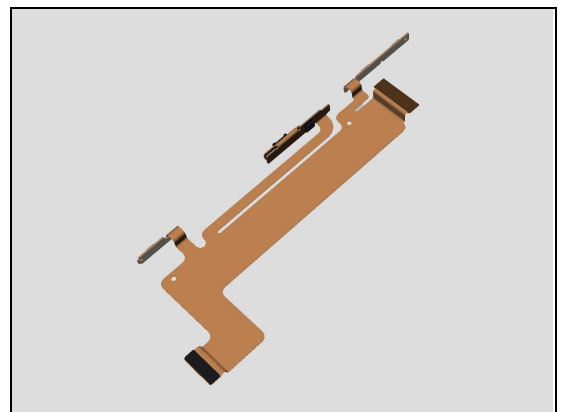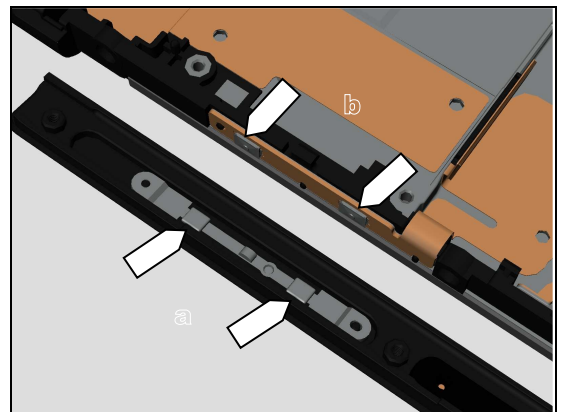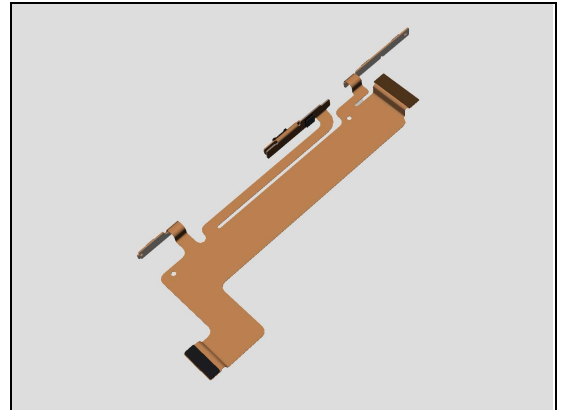

## Problem Areas: Keys

### 1.2.3 On/Off Key

**Check:**

Inspect the external area of the On/Off Key.

**Action:**

1. If dirty – clean it.

2. If damaged – replace the FP Module Assy.

**Check:**

Inspect the BtB connector of Sidekey FPC Assy to Main PBA.





**Action:**

1. If not properly connected – disconnect and reconnect it.

2. If dirty or oxidized – clean it.

3. If the Sidekey FPC Assy is damaged – replace it.

4. Replace Main PBA.

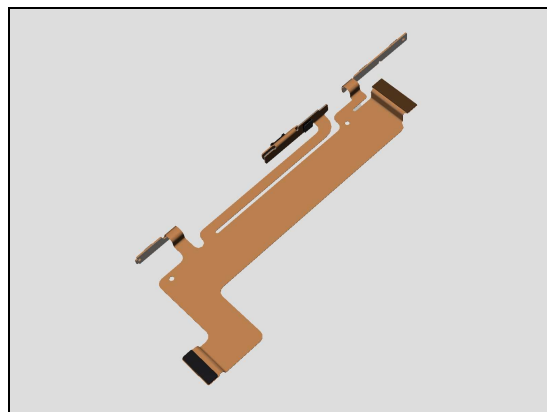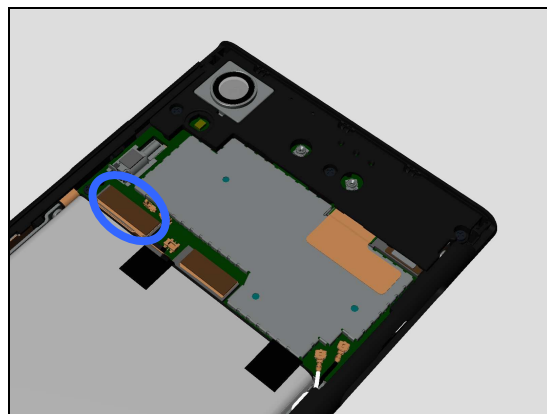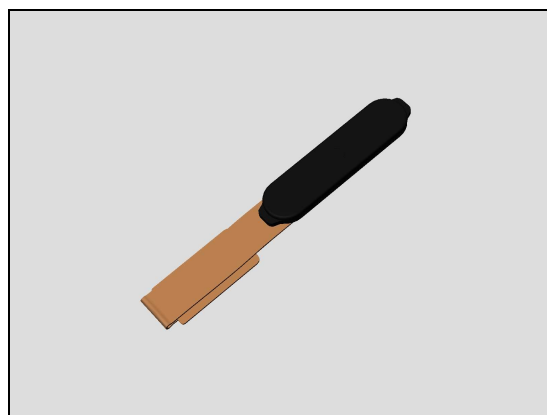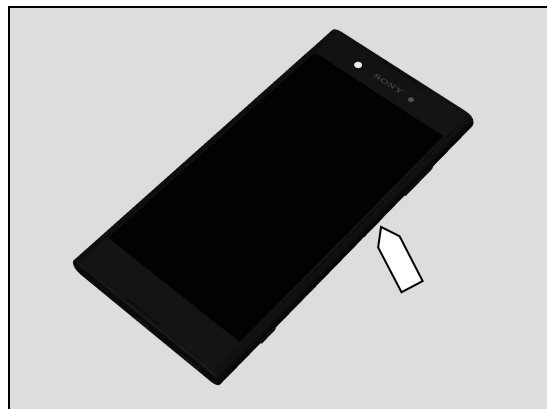

## Problem Areas: Keys

### Check:

Inspect the condition of the On/Off Key switch (a) and On/Off Key rubber (b).

### Action:

1. If dirty – clean them.

2. If the On/Off key switch is damaged – replace the FP Module Assy.





3. If the On/Off Key rubber is damaged – replace the Holder FP Module.

### Check:

Inspect the BtB connector of FP Module Assy to Sidekey FPC Assy.


### Action:

1. If not properly connected – disconnect and reconnect it.  
2. If dirty or oxidized – clean it.

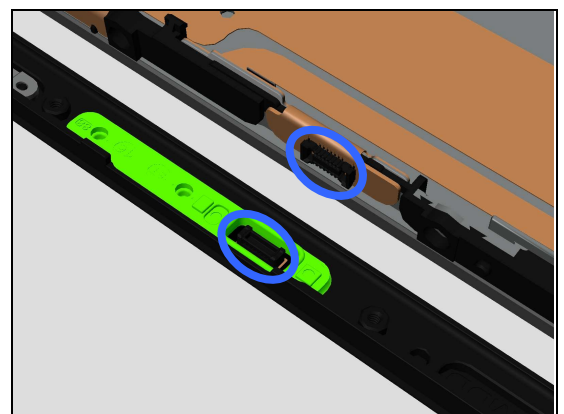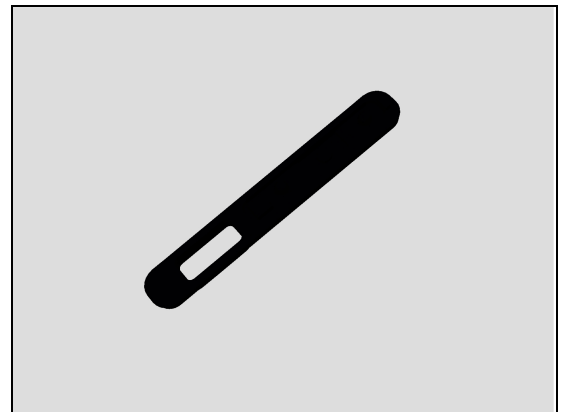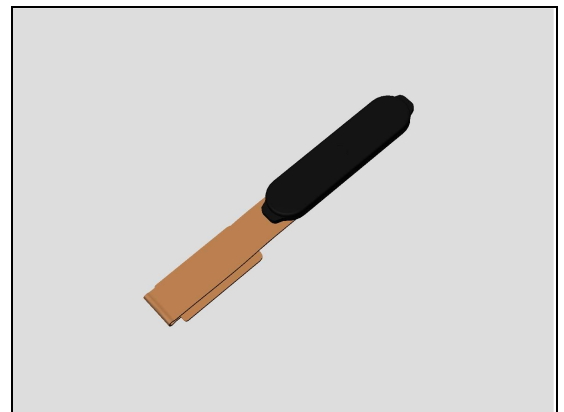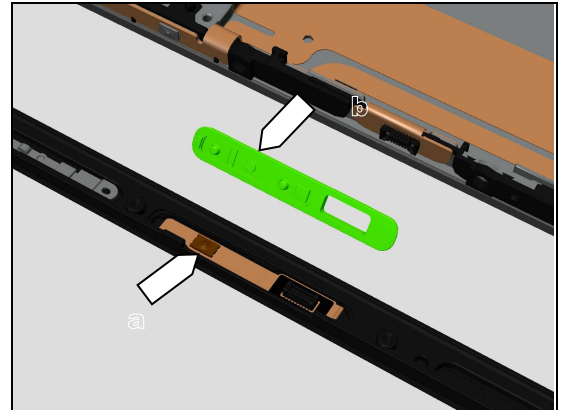


## Problem Areas: Keys

2. If the FP Module Assy is damaged – replace the it.

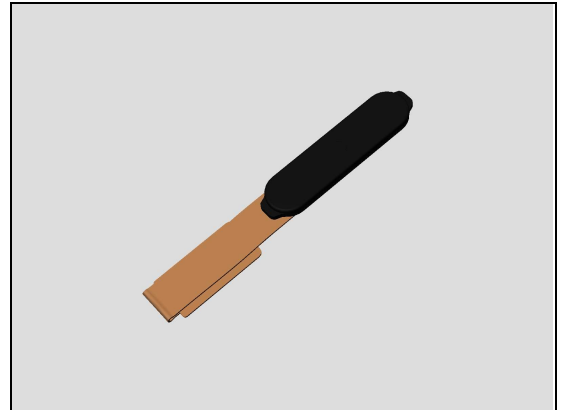

3. If the Sidekey FPC Assy is damaged – replace it.

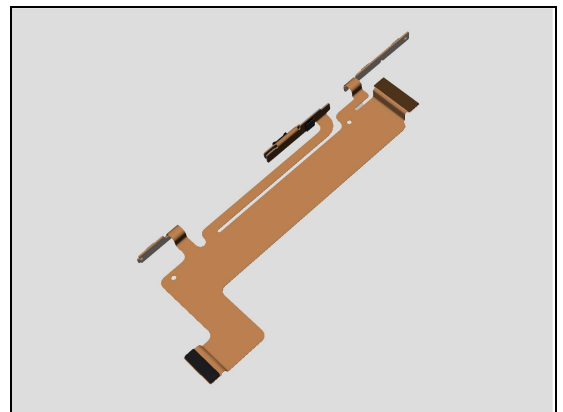


### 1.2.4 Camera Key

**Check:**

Inspect the external area of the Camera Key.

**Action:**

1. If dirty – clean it.

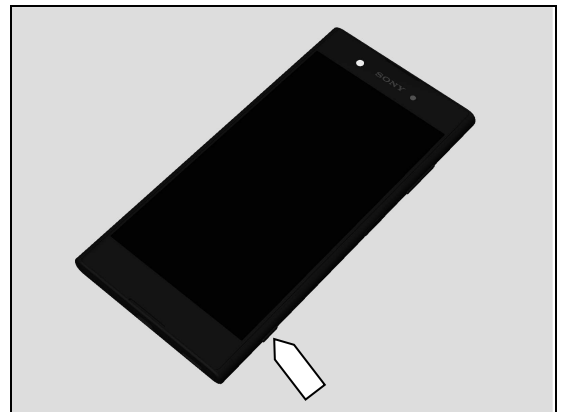

2. If damaged – replace the Key Camera.




## Problem Areas: Keys

### Check:


Inspect the BtB connector of Sidekey FPC Assy to Main PBA.

### Action:

1. If not properly connected – disconnect and reconnect it.
2. If dirty or oxidized – clean it.

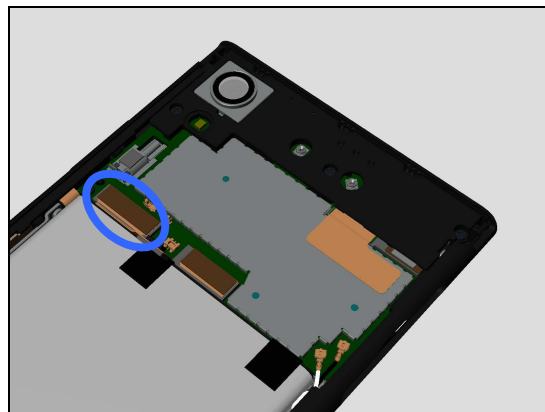

3. If the Sidekey FPC Assy is damaged – replace it.
4. Replace Main PBA.

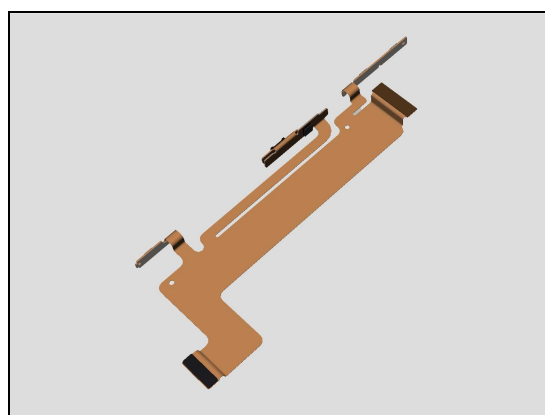


### Check:

Inspect the condition of the Camera Key rubber (a) and Camera Key switch (b).

### Action:

1. If dirty – clean them.

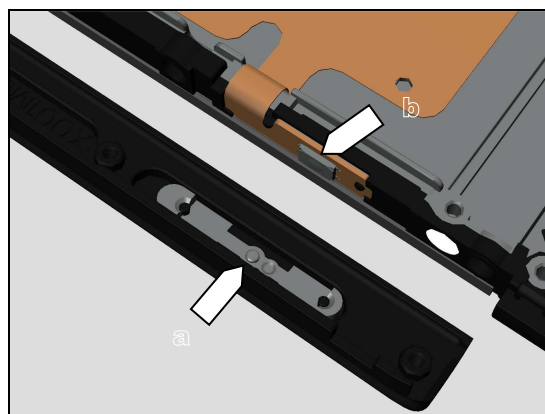


2. If the Camera Key rubber is damaged – replace the Key Camera.



## Problem Areas: Keys

3. If the Camera Key switch is damaged – replace the Sidekey FPC Assy.

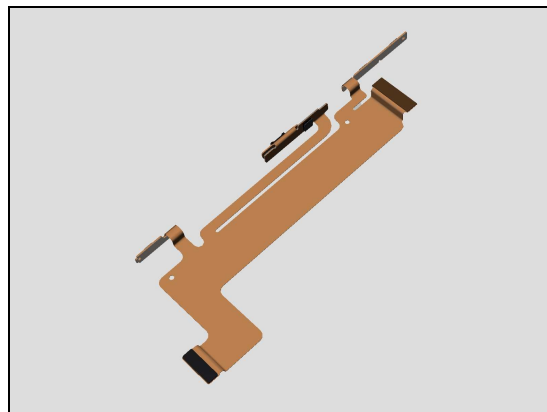

## Problem Areas

### 1.3 Touch Screen

#### 1.3.1 Touch Screen malfunction

**Check:**

Inspect the touch screen of the Display Cover Assy.

**Action:**

1. If dirty – clean it.

2. If scratched or damaged – replace the Display Cover Assy.

**Check:**

Inspect the BtB connector of display FPC to Main PBA.


**Action:**

1. If not properly connected – disconnect and reconnect it.

2. If dirty or oxidized – clean it.

3. If the display FPC is damaged – replace the Display Cover Assy.

4. Replace Main PBA.

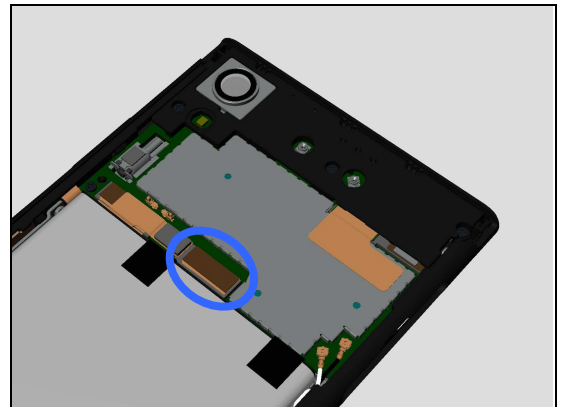

## Problem Areas

### 1.4 Display

#### 1.4.1 Graphics & Illumination

**Check:**

Check whether the phone vibrates after the on/off key has been pressed.

**Action:**

1. If the activation described above is not detected, refer to section 1.1 'Power'.

2. If the Display Cover Assy is damaged – replace it.

**Check:**



Inspect the BtB connector of display FPC to Main PBA.

**Action:**

1. If not properly connected – disconnect and reconnect it.
2. If dirty or oxidized – clean it.

3. If the display FPC is damaged – replace the Display Cover Assy.

4. Replace Main PBA.

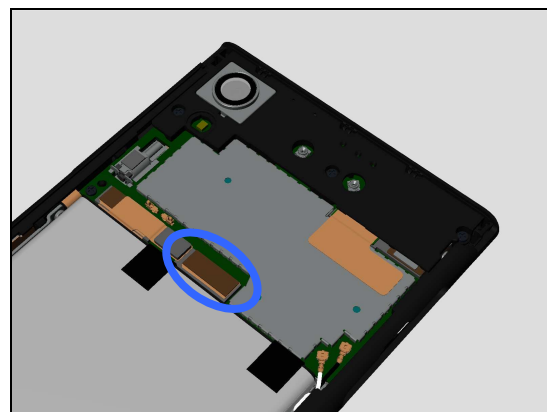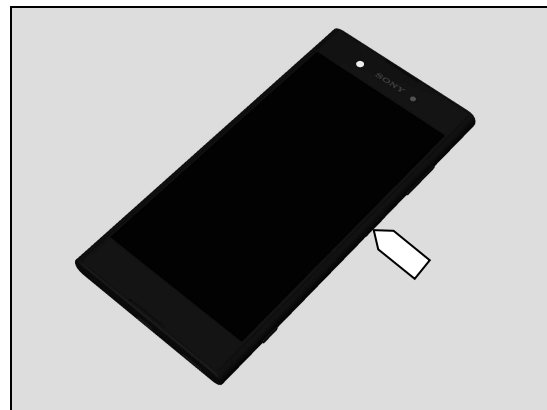

## Problem Areas

### 1.5 LED/Illumination

#### 1.5.1 LED/Illumination

**Check:**

Inspect external window area of Notification LED on the Display Cover Assy.

**Action:**

1. If dirty – clean it.




**Check:**


Inspect the BtB connector of Audio Jack FPC Assy to Main PBA.

**Action:**

1. If not properly connected – disconnect and reconnect it.
2. If dirty or oxidized – clean it.

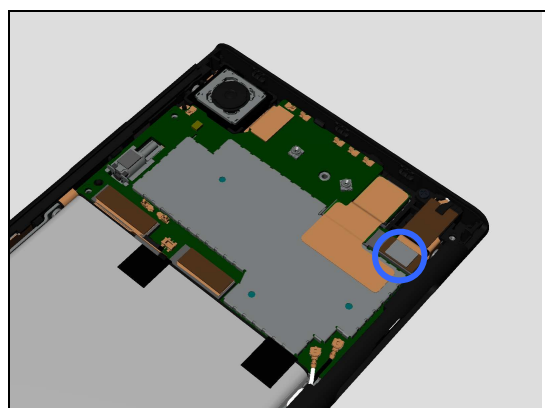

3. If Audio Jack FPC Assy is damaged – replace it.
4. Replace Main PBA

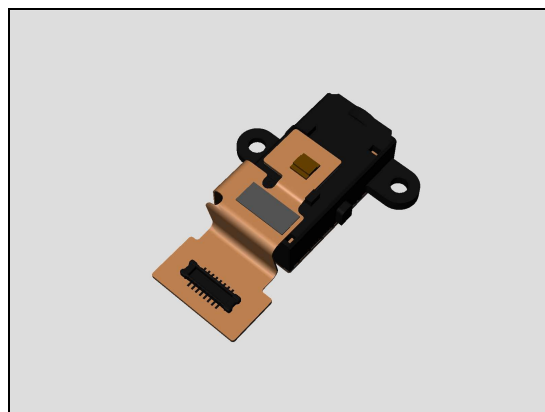


**Check:**

Inspect the Notification LED on the Audio Jack FPC Assy.


**Action:**

1. If dirty – clean it.

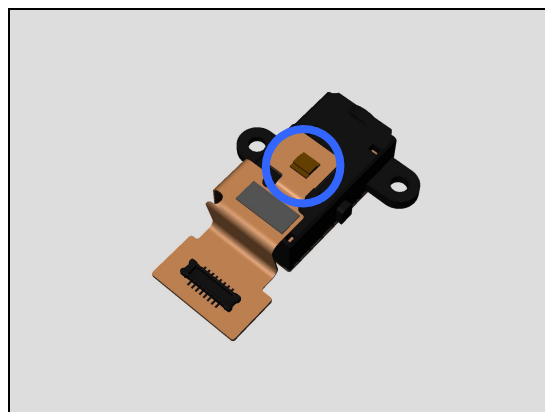

## Problem Areas: LED/Illumination

2. If damaged – Replace Audio Jack FPC Assy.

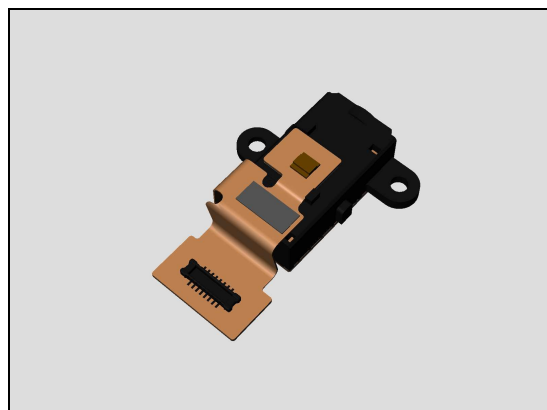

## Problem Areas

### 1.6 Speaker

#### 1.6.1 Loudspeaker

**Check:**


Inspect the Loudspeaker external port on the Display Cover Assy.

**Action:**

1. If clogged – clean it.



2. If damaged – replace the Speaker Mesh.

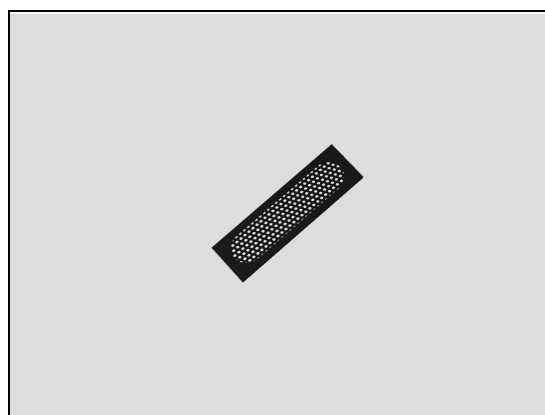


**Check:**


Inspect the contact pads on the Main Antenna Speaker Box and the contact pins on the Sub PBA Assy.

**Action:**

1. If pins and pads dirty – clean them.

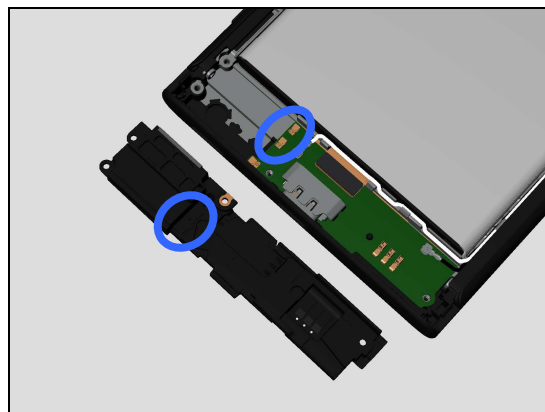

2. If contact pads or loudspeaker are damaged – replace the Main Antenna Speaker Box.

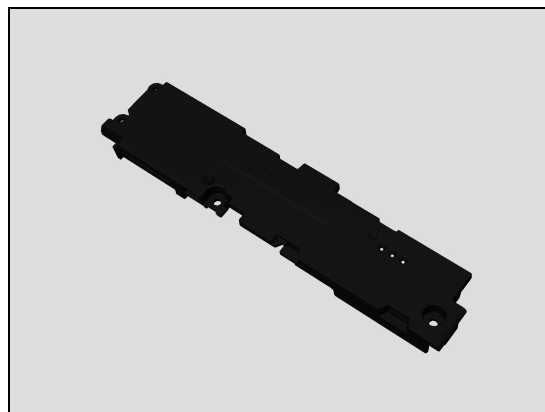

## Problem Areas: Speaker

3. If contact pins are damaged – Replace Sub PBA Assy.

**Check:**





Inspect the BtB connector of the Sidekey FPC Assy to Sub PBA Assy.

**Action:**

1. If not properly connected – disconnect and reconnect it.
2. If dirty or oxidized – clean it.

3. If Sub PBA Assy is damaged – Replace it.

4. If the Sidekey FPC Assy is damaged – Replace it.

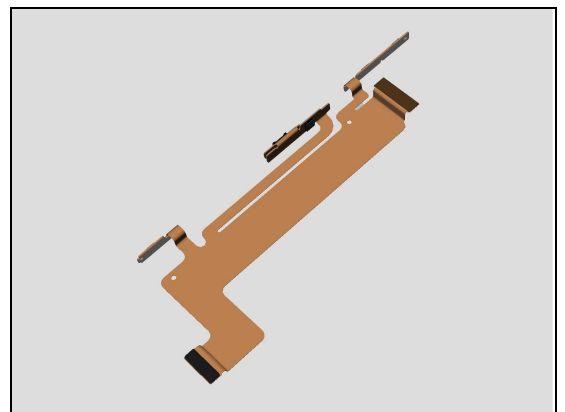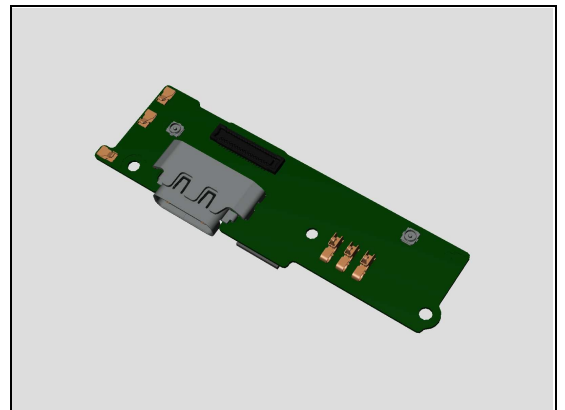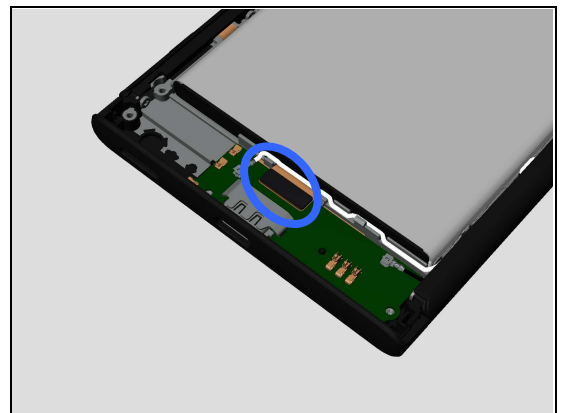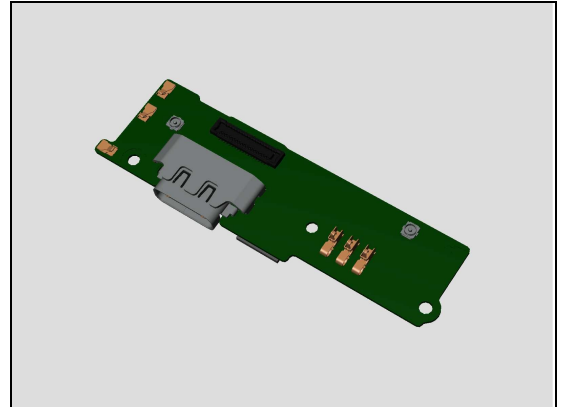


## Problem Areas: Speaker

### Check:


Inspect the Speaker Sponge on the Main Antenna Speaker Box.

.

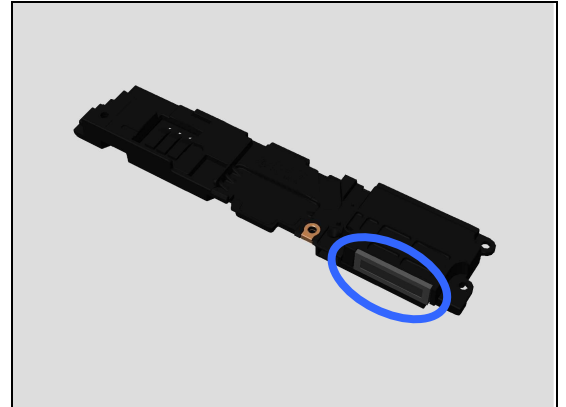

### Action:

1. If damaged – replace the Speaker Sponge.

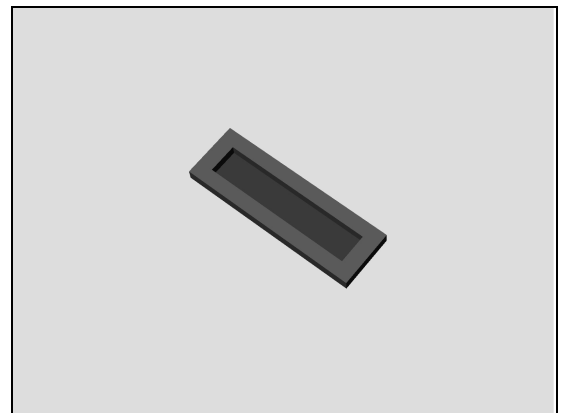


### Check:


Inspect the BtB connector of Sidekey FPC Assy to Main PBA.

### Action:

1. If not properly connected – disconnect and reconnect it.
2. If dirty or oxidized – clean it.

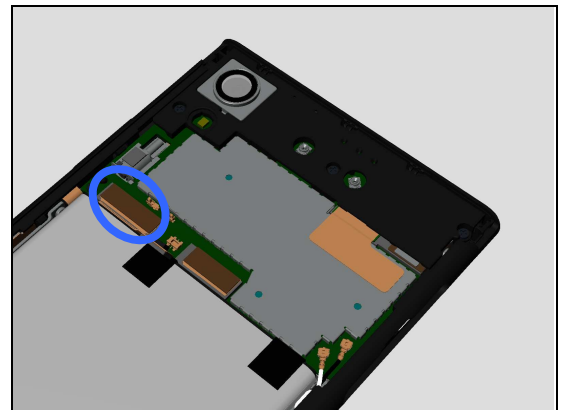

3. If the Sidekey FPC Assy is damaged – replace it.
4. Replace Main PBA.

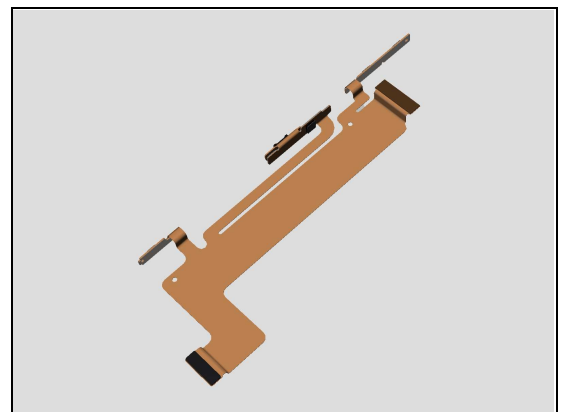

## Problem Areas

### 1.7 Earphone


#### 1.7.1 Ear Speaker

**Check:**

Inspect the external port of Ear Speaker on the Display Cover Assy.

**Action:**

1. If clogged – clean it.

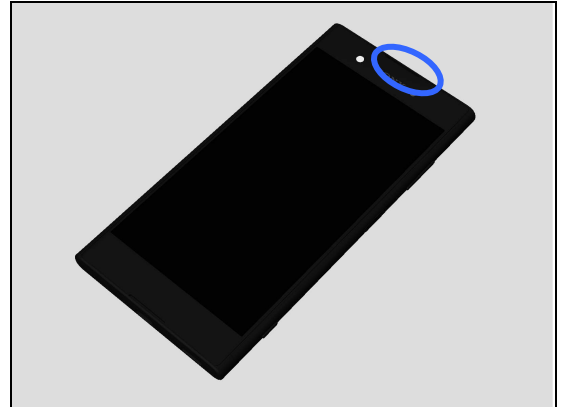


**Check:**


Inspect the contact pads on the Main PBA and the contact pins on the Ear Speaker.

**Action:**

1. If dirty – clean them.

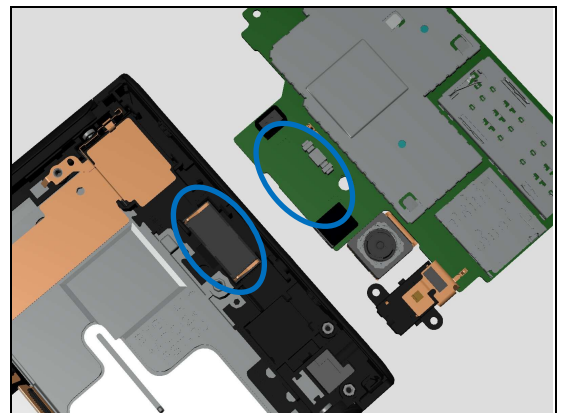

2. If the contact pins of the Ear Speaker or the Ear Speaker are damaged – replace it.
3. Replace Main PBA.

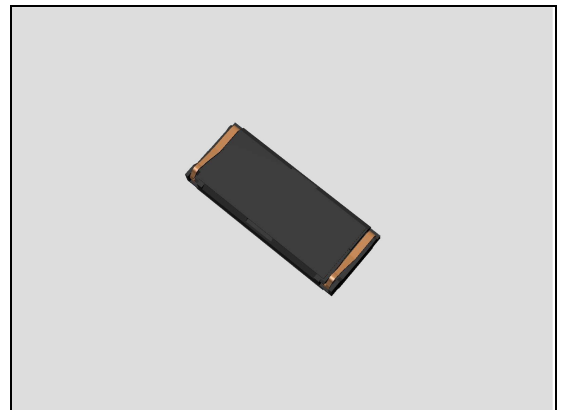

## Problem Areas

### 1.8 Microphone

#### 1.8.1 Primary Microphone

**Check:**

Inspect the Primary Microphone's external port on the Display Cover Assy.


**Action:**

1. If clogged – clean it.




**Check:**

Inspect Sponge 1st Mic and main Mic.

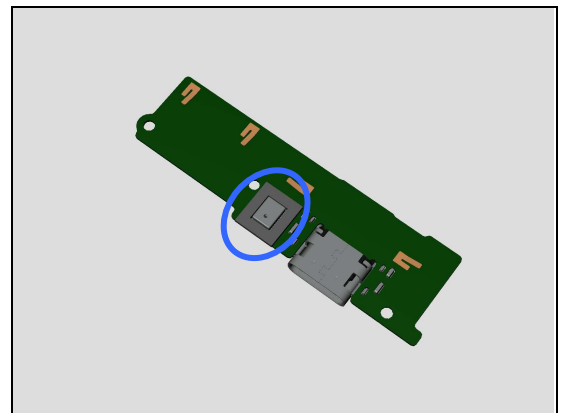


**Action:**

1. If the Sponge 1st Mic is damaged – replace it.

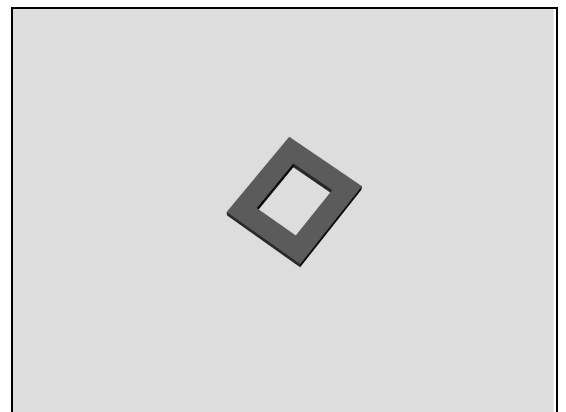

2. If the Main MIC is damaged – replace Sub PBA Assy.

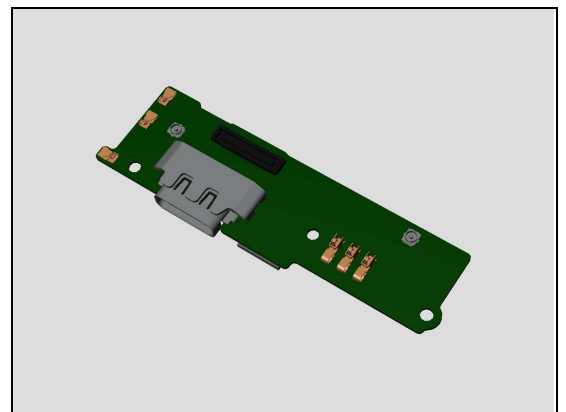


## Problem Areas: Microphone

### Check:


Inspect the BtB connector of Sidekey FPC Assy to Sub PBA Assy.

### Action:


1. If not properly connected – disconnect and reconnect it.
2. If dirty or oxidized – clean it.

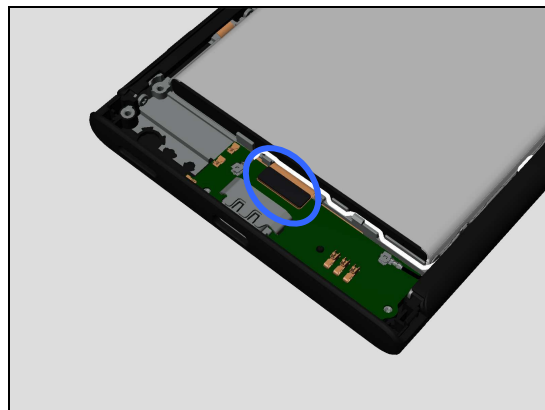

3. If Sub PBA Assy is damaged – replace it.

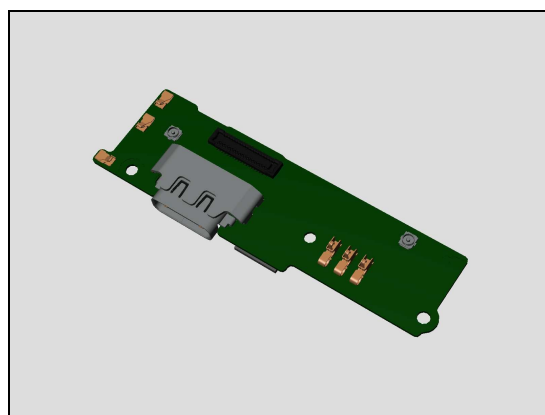

4. If Sidekey FPC Assy is damaged – replace it.

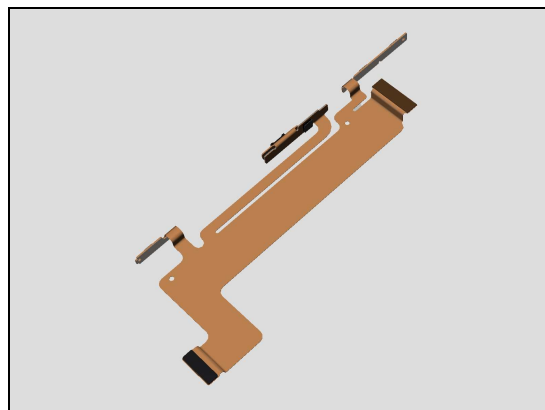


### Check:

Inspect the BtB connector of Sidekey FPC Assy to Main PBA.


### Action:

1. If not properly connected – disconnect and reconnect it.
2. If dirty or oxidized – clean it.

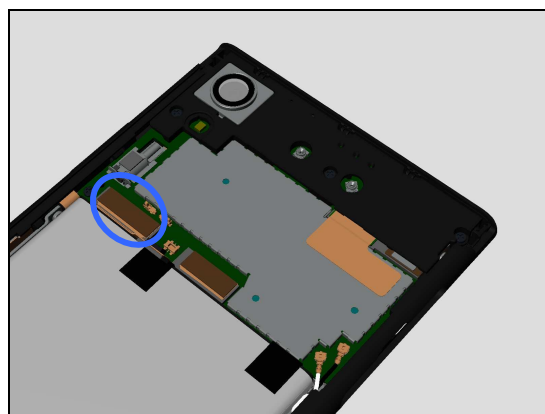

## Problem Areas: Microphone

3. If the Sidekey FPC Assy is damaged – replace it.
4. Replace Main PBA.

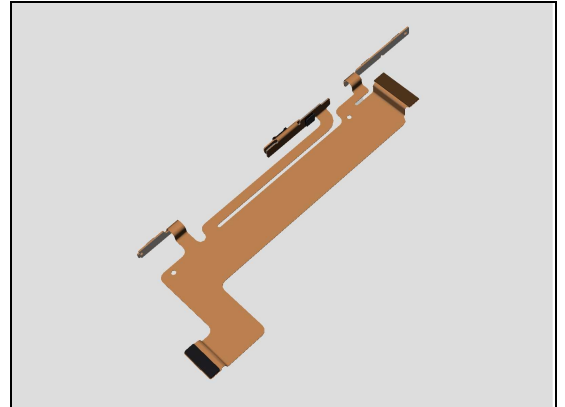

### 1.8.2 Secondary Microphone

**Check:**

Inspect the external port of secondary microphone on the Display Cover Assy.


**Action:**

1. If clogged – clean it.




**Check:**

Inspect the Rubber 2nd MIC.

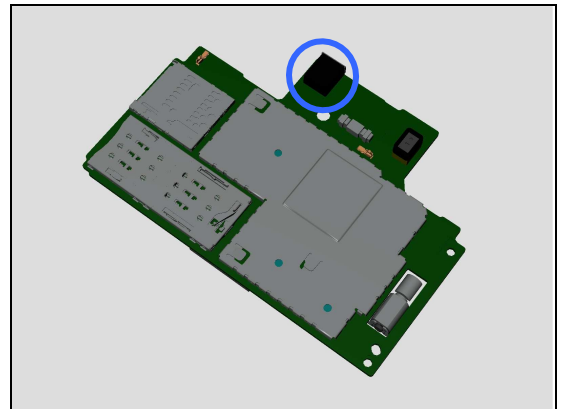

**Action:**

1. If Rubber 2nd MIC is not properly attached or damaged – replace the Rubber 2nd MIC.
2. Replace Main PBA

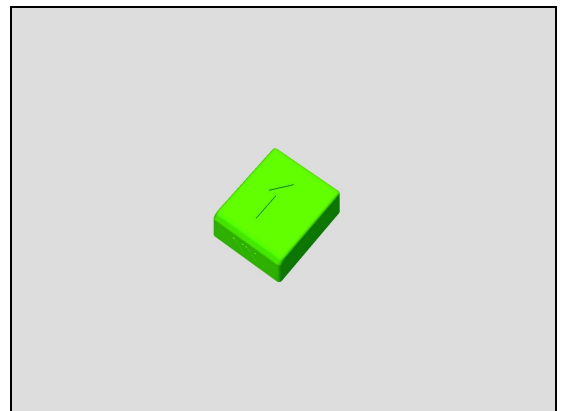


## Problem Areas

### 1.9 Vibrator

#### 1.9.1 Vibrator not generating alerts

**Action:**

1. Replace Main PBA.

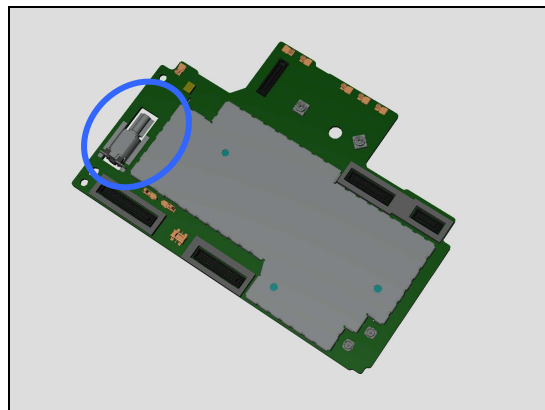

## Problem Areas

### 1.10 Camera

#### 1.10.1 Main Camera

**Check:**


Inspect the external area of camera window.

**Action:**

1. If dirty – clean it.



2. If scratched or damaged – replace the Main Camera Lens Assy.

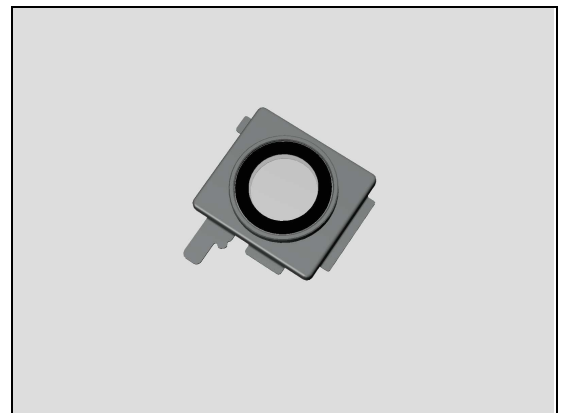


**Check:**


Inspect the BtB connector of Main Camera to Main PBA.

**Action:**

1. If not properly connected – disconnect and reconnect it.
2. If dirty or oxidized – clean it.

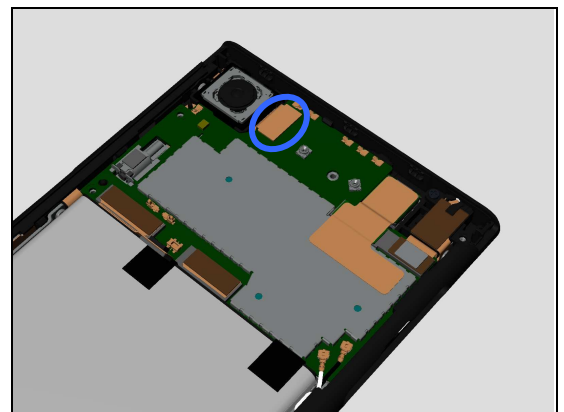

3. If the BtB connector or the Main Camera is damaged – replace the Main Camera.
4. Replace Main PBA.

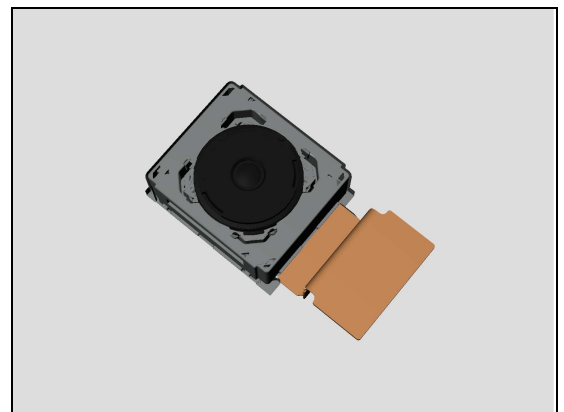

## Problem Areas: Camera

### 1.10.2 Video Call Camera defects

**Check:**

Inspect the external area of the Front camera window.

**Action:**

1. If dirty – clean it.



2. If scratched or damaged – replace the Display Cover Assy.




**Check:**


Inspect the BtB connector of Front Camera to Main PBA.

**Action:**

1. If not properly connected – disconnect and reconnect it.
2. If dirty or oxidized – clean it.

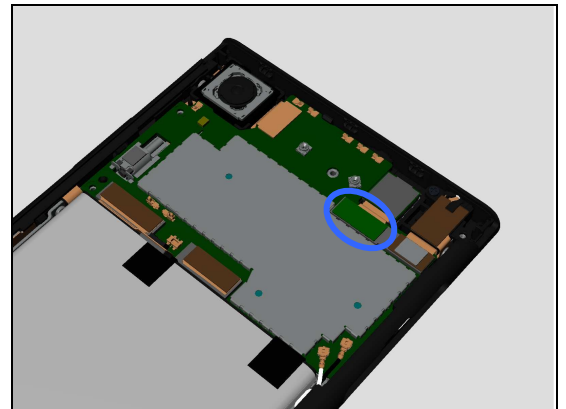

3. If the Front Camera is damaged – replace the Front Camera.
4. Replace Main PBA.

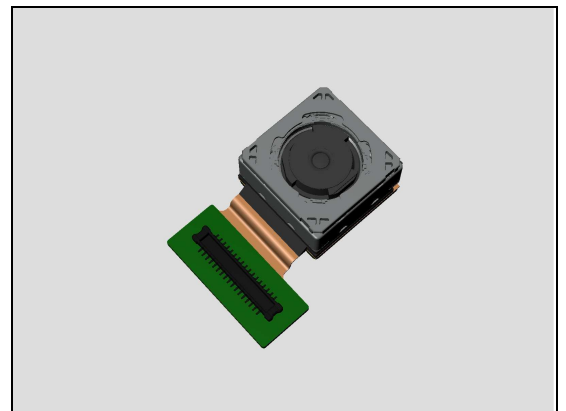

## Problem Areas

### 1.11 Flash LED

#### 1.11.1 Main Camera Flash LED not flashing

**Check:**

Inspect the Main Camera flash LED lens.

**Action:**

1. If dirty – clean it.

2. If scratched or damaged – replace the Battery Cover Assy.


**Check:**

Inspect the Flash LED on Main PBA.

**Action:**

1. If dirty – clean it.

2. If Flash LED is damaged – Replace Main PBA.

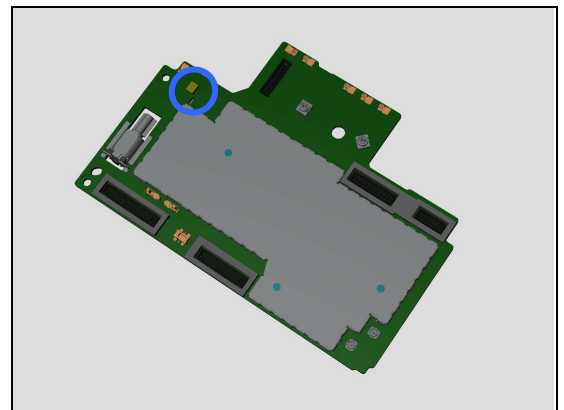

## Problem Areas

### 1.12 Bluetooth and WLAN

#### 1.12.1 Bluetooth or WLAN connection failure

**Check:**




Inspect the contact pads on Sub Antenna and the contact pins on main PBA.

**Action:**

1. If dirty or oxidized – clean the pads and pins.

2. If the contact pads on Sub Antenna Assy are damaged – replace the Sub Antenna.

3. If the contact pins on Main PBA is damaged – replace Main PBA.

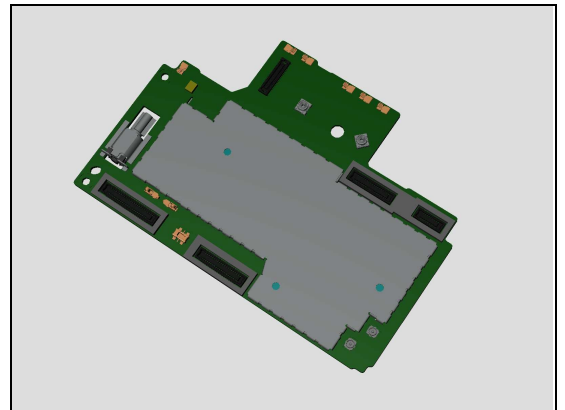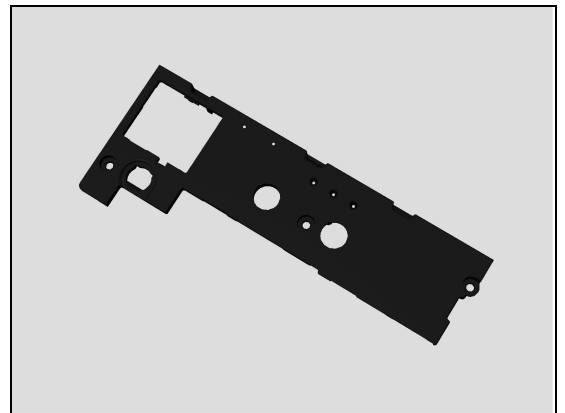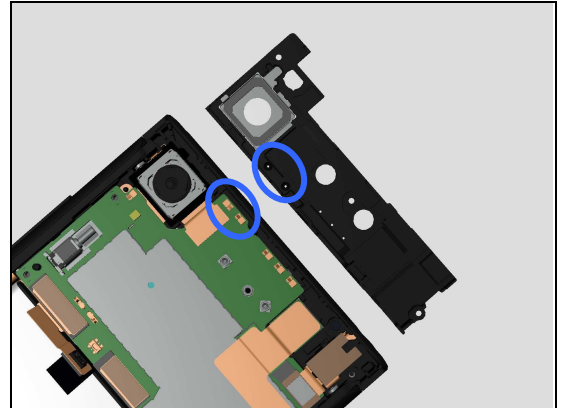

## Problem Areas

### 1.13 NFC

#### 1.13.1 NFC malfunctions

**Check:**




Inspect the NFC antenna contact pads and the contact pins on Main PBA.

**Action:**

1. If dirty or oxidized – clean the pads and pins.

2. If the NFC antenna contact pads are damaged – replace the Antenna NFC.

3. If the contact pins on main PBA are damaged – replace Main PBA.

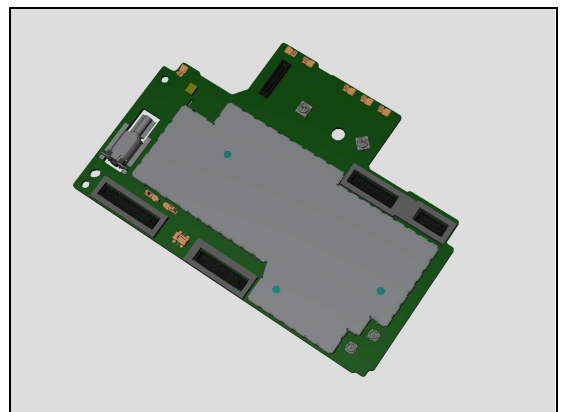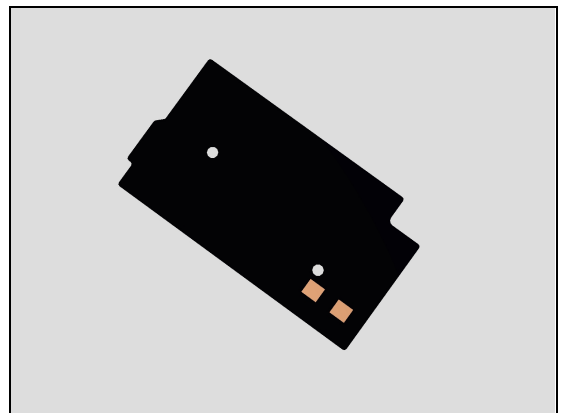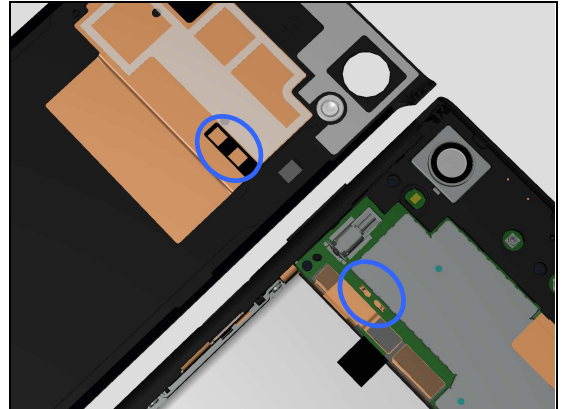

## Problem Areas

### 1.14 GPS

#### 1.14.1 GPS malfunctions

**Check:**




Inspect the contact pads on Sub Antenna and the contact pins on main PBA.

**Action:**

1. If dirty or oxidized – clean the pads and pins.

2. If the contact pads on Sub Antenna are damaged – replace the Sub Antenna.

3. If the contact pins on Main PBA is damaged – replace Main PBA.

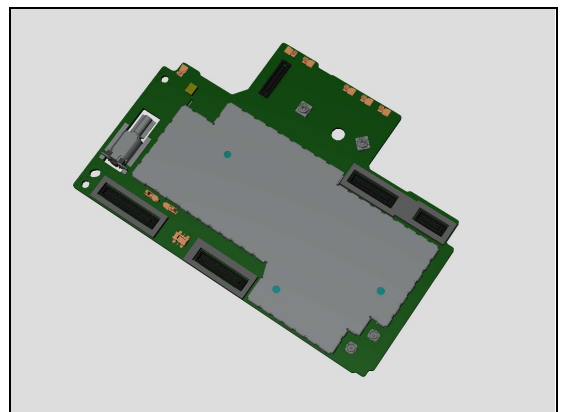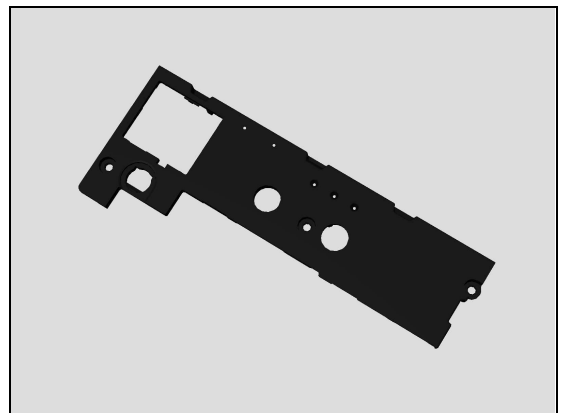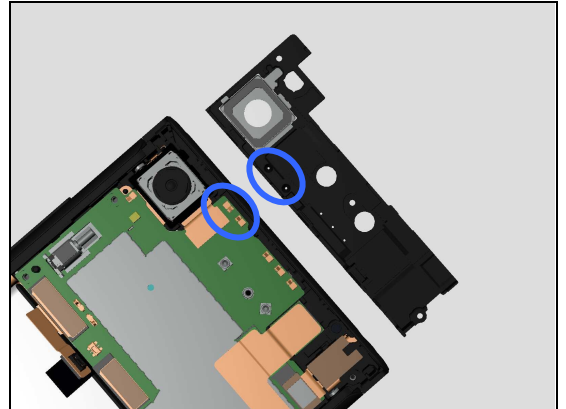

## Problem Areas

### 1.15 Compass

#### 1.15.1 Compass fails

**Action:**

1. Replace Main PBA.

## Problem Areas

### 1.16 Accelerometer

#### 1.16.1 Accelerometer test fails

**Action:**

1. Follow 1309-7255 CS-Everest (Repair -Mechanical- Tools and Equipment (include Repair Software), Info-Center number is RE4251) to run accelerometer (G-sensor) Calibration.
2. Replace Main PBA.

## Problem Areas

### 1.17 Gyroscope

#### 1.17.1 Gyroscope test fails

N/A.

## Problem Areas

### 1.18 Ambient Light Sensor

#### 1.18.1 Light Sensor malfunctions

Follow 1309-7255 CS-Everest (Repair -Mechanical- Tools and Equipment (include Repair Software), Info-Center number is RE4251) to run Light-sensor Calibration.

**Check:**

Inspect the external window area of light sensor on the Display Cover Assy.

**Action:**



1. If dirty – clean it.
2. If scratched or damaged – replace the Display Cover Assy.

**Check:**

Inspect the Rubber PL Sensor.

**Action:**

1. If not properly assembled – reassemble it.
2. If damaged – replace the Rubber PL Sensor.

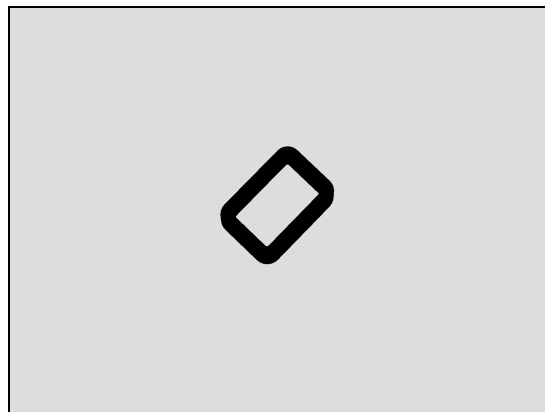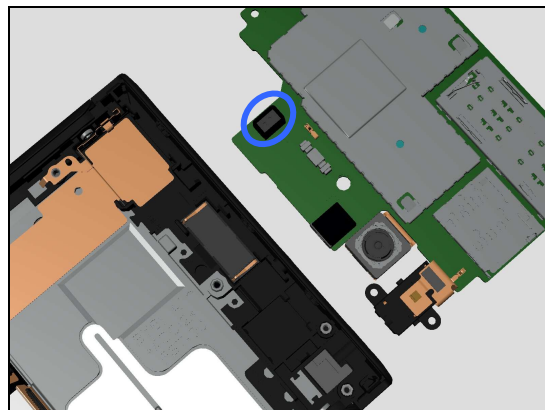


## Problem Areas: Ambient Light Sensor

**Check:**


Inspect the light sensor on the Main PBA.

**Action:**

1. If dirty – clean it.

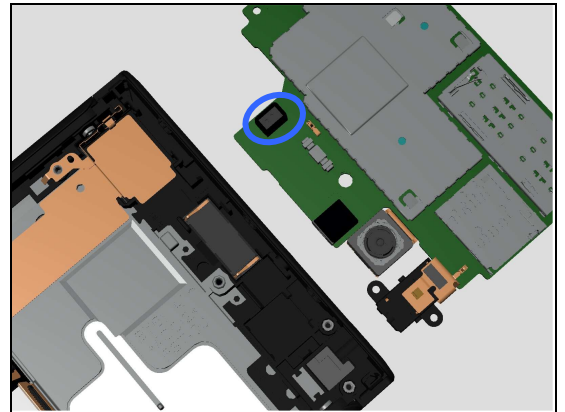

2. If damaged – Replace Main PBA.

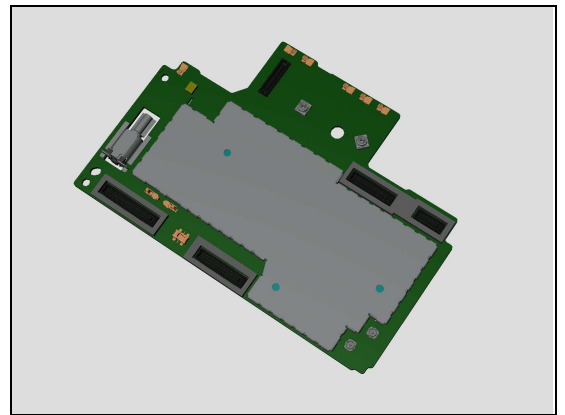

## Problem Areas

### 1.19 Proximity Switch

#### 1.19.1 Proximity switch malfunctions

Follow 1309-7255 CS-Everest (Repair -Mechanical- Tools and Equipment (include Repair Software), Info-Center number is RE4251) to run Light-sensor Calibration.

**Check:**

Inspect the external window area of Proximity sensor on the Display Cover Assy.

**Action:**



1. If dirty – clean it.
2. If scratched or damaged – replace the Display Cover Assy.

**Check:**

Inspect the Rubber PL Sensor.

**Action:**

1. If not properly assembled – reassemble it.
2. If damaged – replace the Rubber PL Sensor.

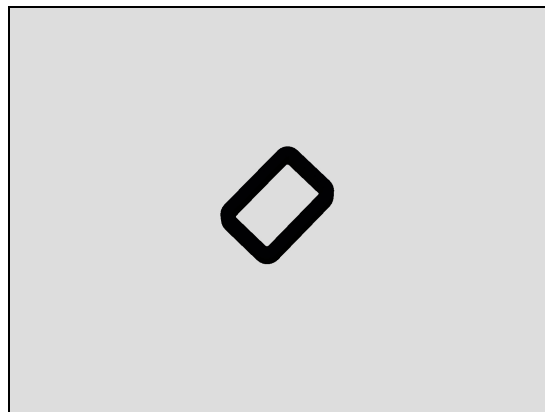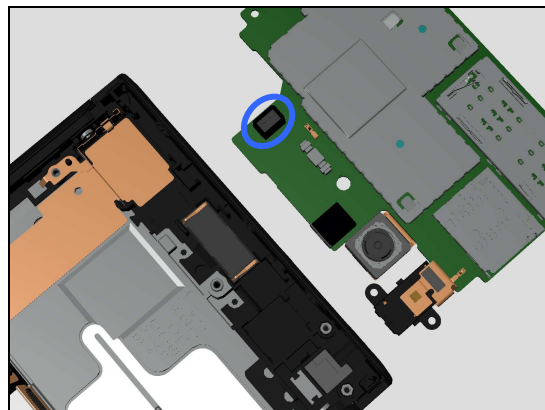


## Problem Areas: Proximity Switch

**Check:**


Inspect the Proximity sensor on the Main PBA.

**Action:**

1. If dirty – clean it.

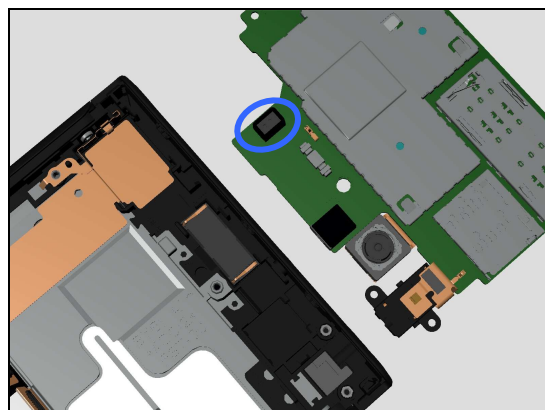

2. If damaged – Replace Main PBA.

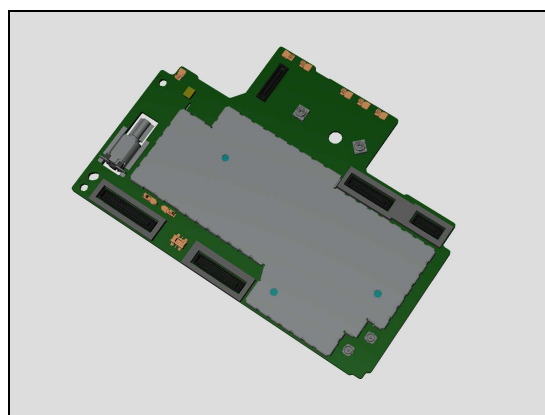

## Problem Areas

### 1.20 Hall Sensor

#### 1.20.1 Hall Sensor test fails

**Action:**

Replace Main PBA.

## Problem Areas

### 1.21 Real Time Clock

#### 1.21.1 Real time clock test fails

**Action:**

Replace Main PBA.

## Problem Areas

### 1.22 Total call time

#### 1.22.1 Total call time fails

**Action:**

Replace Main PBA.

## Problem Areas

### 1.23 External Memory


#### 1.23.1 Memory Card not detected

**Check:**

Inspect the external port of the memory card holder.

**Action:**

If dirty or clogged – clean the external port.

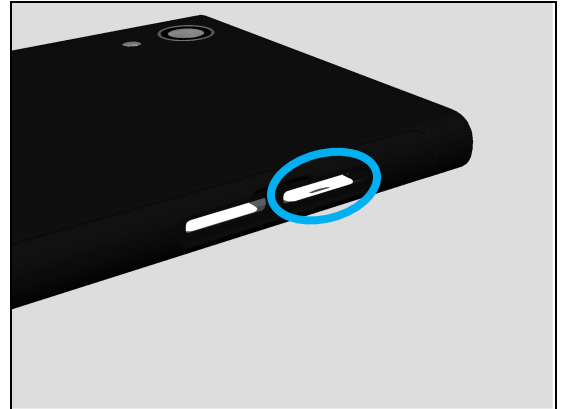


**Check:**

Inspect the memory card holder on Main PBA.

**Action:**

1. If dirty or clogged – clean the holder.
2. Replace Main PBA.

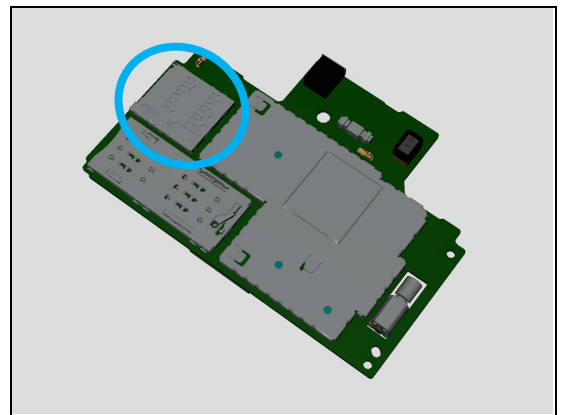

## Problem Areas

### 1.24 Security

#### 1.24.1 Security fails

**Action:**

Replace Main PBA.

## Problem Areas

### 1.25 FM Radio

#### 1.25.1 No/Poor FM Radio reception

**Check:**

Inspect the external port of the Audio Jack FPC Assy.

**Action:**

1. If dirty or oxidized – clean it.




**Check:**


Inspect the BtB connector of Audio Jack FPC Assy to Main PBA.

**Action:**

1. If not properly connected – disconnect and reconnect it.
2. If dirty or oxidized – clean it.

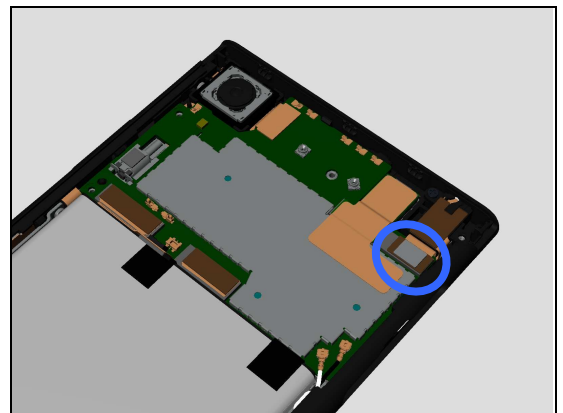

3. If the Audio Jack FPC Assy is damaged – replace the Audio Jack Assy.
4. Replace Main PBA.

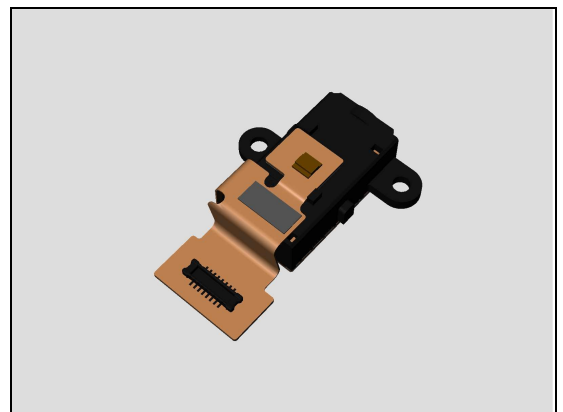

## Problem Areas

### 1.26 Verify Certificates

#### 1.26.1 Verify Certificates fails

**Action:**

N/A.

## Problem Areas

### 1.27 Network & Signal

#### 1.27.1 No/Poor signal

**Check:**

Inspect the Contact Clip Speaker Box, contact pins on the Sub PBA Assy and contact pads on the Main Antenna Speaker Box.





**Action:**

1. If dirty or oxidized – clean them.

2. If the contact pads on the Main Antenna Speaker Box are damaged – replace the Main Antenna Speaker Box.

3. If the Contact Clip Speaker Box is damaged – replace it.

4. If the contact pins on the Sub PBA Assy are damaged – replace Sub PBA Assy.

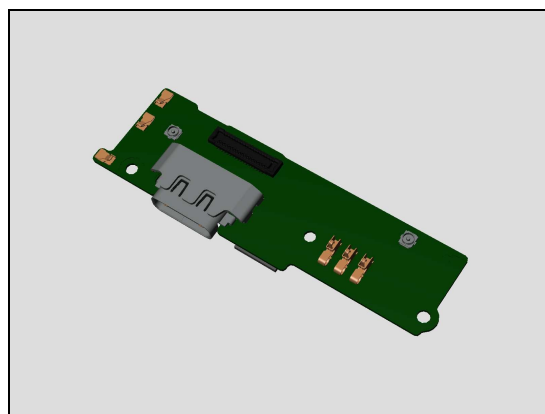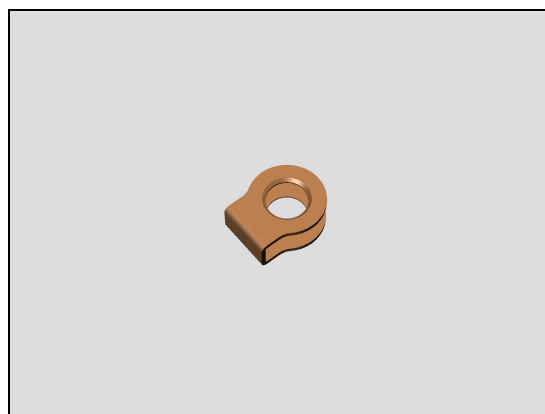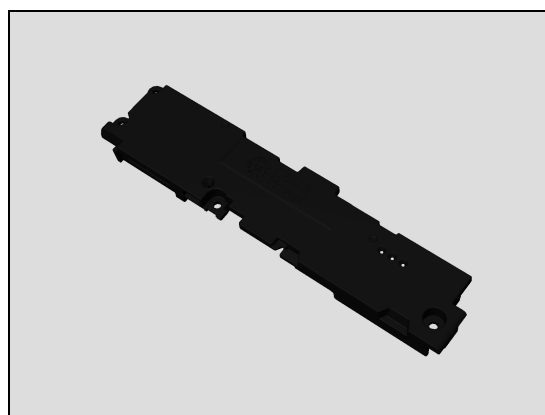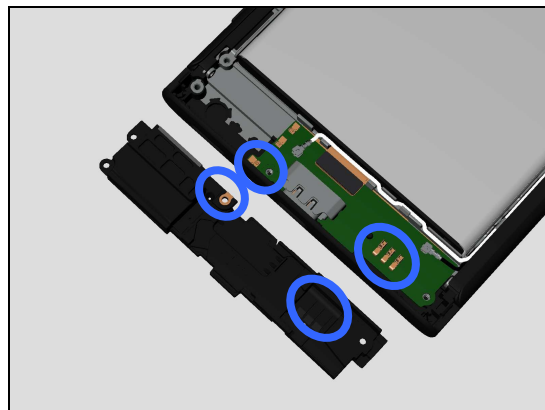

## Problem Areas: Network & Signal


### ***This is only for G3421,G3423,G3426!***

#### **Check:**

Inspect the RF connectors of RF Cable to the Main PBA and Sub PBA Assy.

#### **Action:**

1. If not properly connected – disconnect and reconnect them.
2. If dirty or oxidized – clean them.

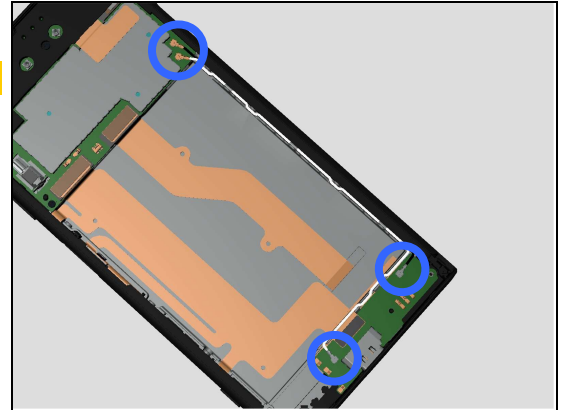


### ***This is only for G3412, G3416!***

#### **Check:**


Inspect the RF connectors of RF Cable to the Main PBA and Sub PBA Assy.

#### **Action:**

1. If not properly connected – disconnect and reconnect them.
2. If dirty or oxidized – clean them.

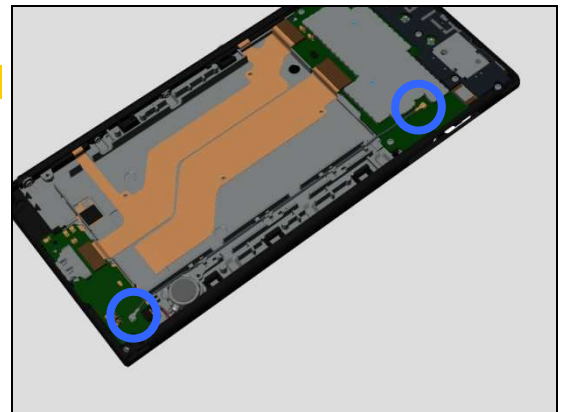


3. If the connectors on the Sub PBA Assy is damaged – replace Sub PBA Assy.

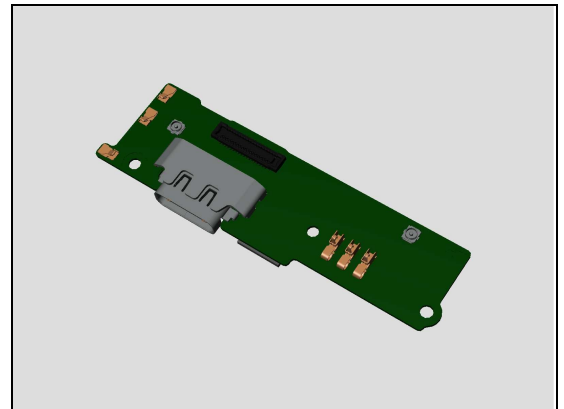

### ***This is only for G3421,G3423,G3426!***


4. If the RF Cable is damaged – replace it.

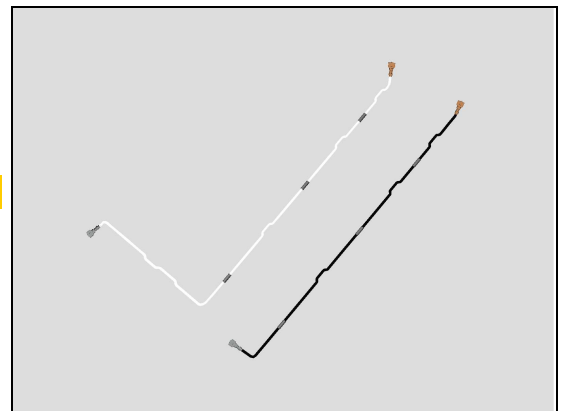


## Problem Areas: Network & Signal

***This is only for G3412, G3416!***

4. If the RF Cable is damaged – replace it.

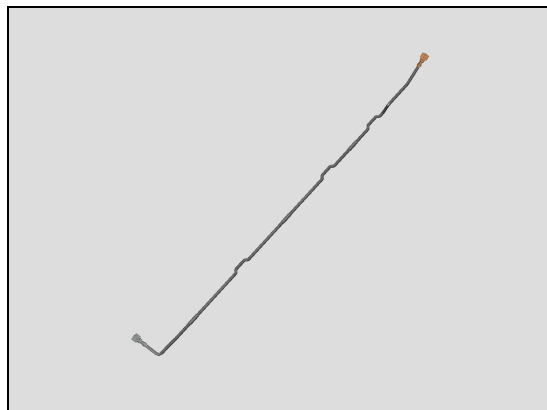

5. If the connector on the Main PBA is damaged – replace Main PBA.

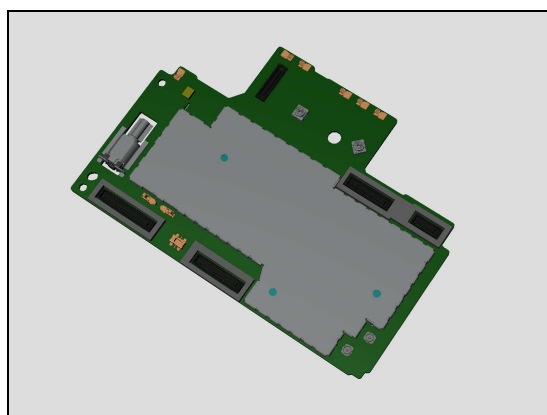


***This is only for G3421,G3423,G3426!***

**Check:**

Inspect if the metal parts of the RF Cables are mounted into its clips.

**Action:**

If not properly assembled – reassemble it.

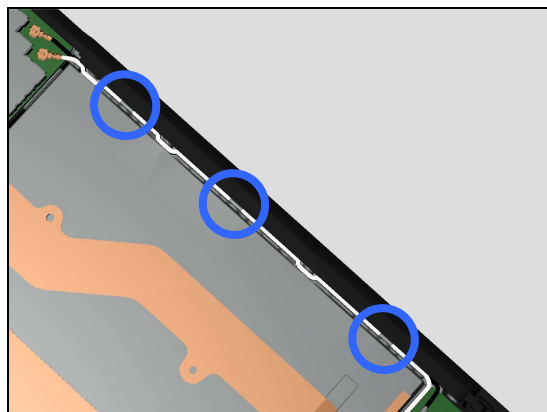


***This is only for G3412, G3416!***

**Check:**

Inspect if the three metal parts of the RF Cable are mounted into its clips.

**Action:**

If not properly assembled – reassemble it.

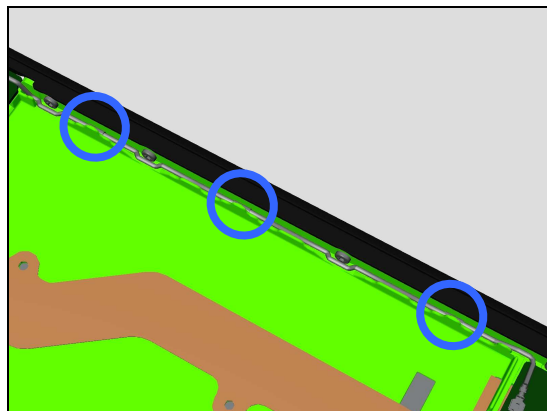


## Problem Areas: Network & Signal

### Check:


Inspect the contact pins on the Main PBA and contact pads on the Sub Antenna.

### Action:


1. If dirty or oxidized – clean them.

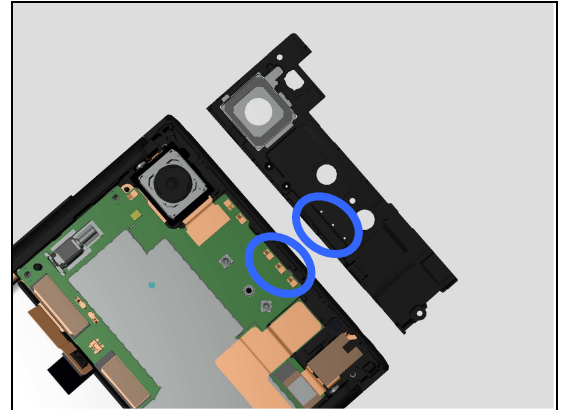

2. If the contact pads on the Sub Antenna are damaged – replace it.

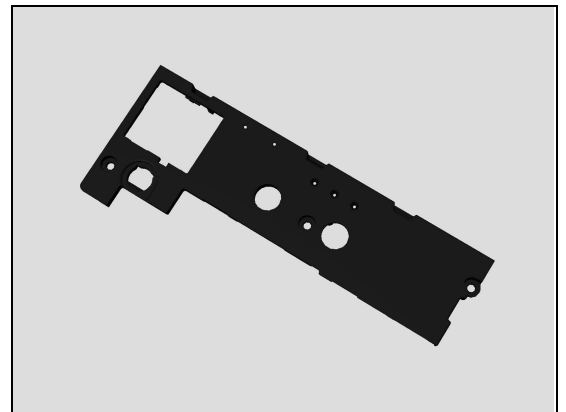

3. If the contact pins on the Main PBA are damaged – replace Main PBA.

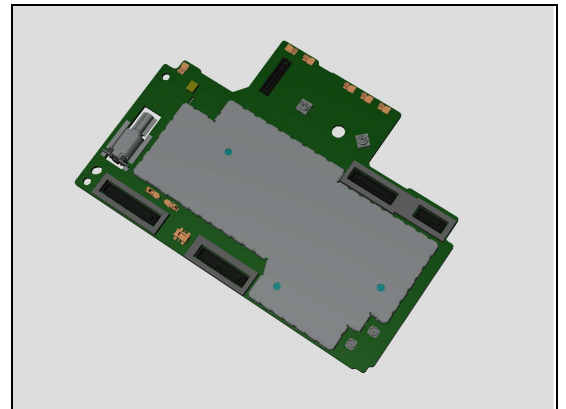


### Check:

Inspect the two contact pins on the Main PBA are damaged or not.

### Action:

1. If damaged – replace Main PBA.

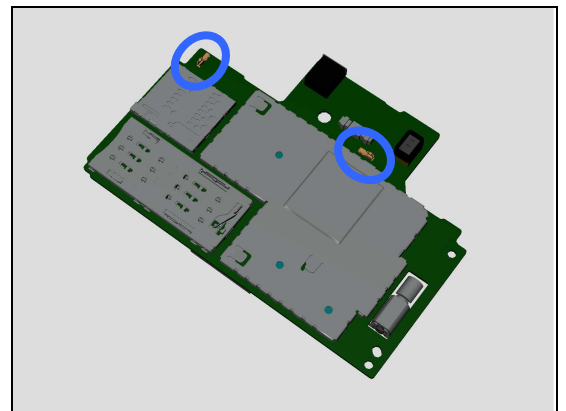

## Problem Areas

### 1.28 SIM (G3421,G3423)


#### 1.28.1 SIM not detected

**Check:**

Inspect the external port of the SIM card holder.

**Action:**

If dirty or clogged – clean the external port.

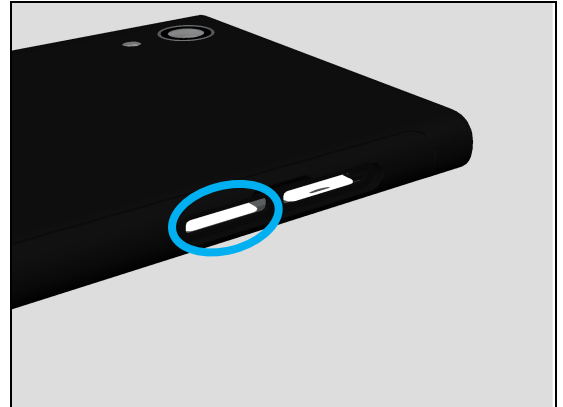


**Check:**

Check if Nano SIM is properly mounted into the Cap Tray Single and if a Cap Tray Single can be properly inserted into its holder and inspect the Cap Tray Single.

**Action:**

1. If not properly assembled – reassemble it.
2. If Cap Tray Single is damaged – Replace it.

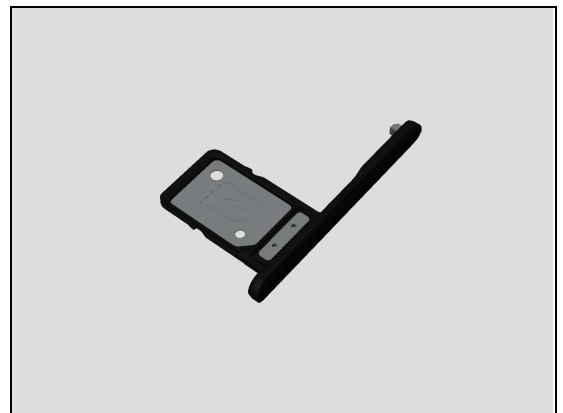


**Check:**

Inspect the SIM card holder on Main PBA.

**Action:**

1. If dirty or clogged – clean the holder.
2. Replace Main PBA.

**Note: only Single SIM illustration shown!**

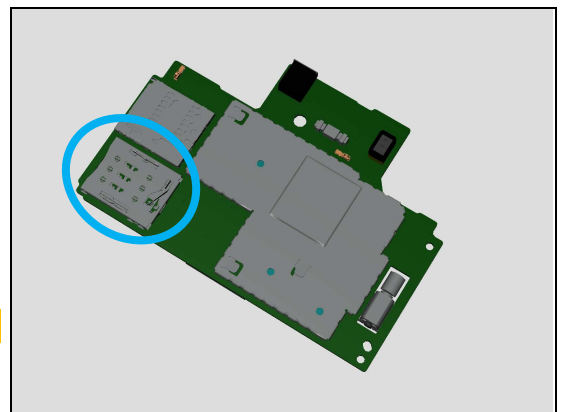

#### 1.28.2 Incorrect Nano SIM indicated

**Check:**

Check whether the phone is locked to a particular operator and whether the correct operator Nano SIM is being used.

**Action:**

1. Use a proper operator Nano SIM or test Nano SIM.
2. Replace Main PBA.



## Problem Areas

### 1.29 SIM (G3412,G3416,G3426)


#### 1.29.1 SIM not detected

**Check:**

Inspect the external port of the SIM card holder.

**Action:**

If dirty or clogged – clean the external port.

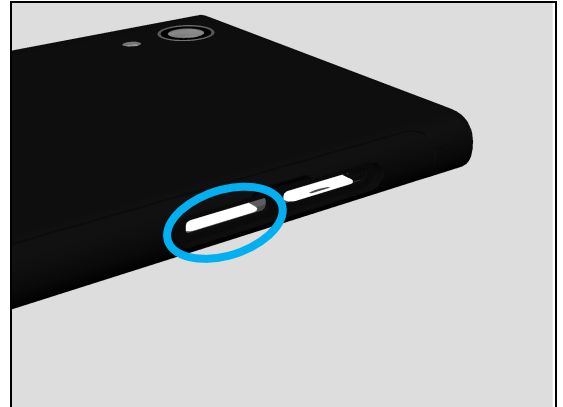


**Check:**

Check if Nano SIM is properly mounted into the Cap Tray Dual and if a Cap Tray Dual can be properly inserted into its holder and inspect the Cap Tray Dual.

**Action:**

1. If not properly assembled – reassemble it.
2. If Cap Tray Dual is damaged – Replace it.

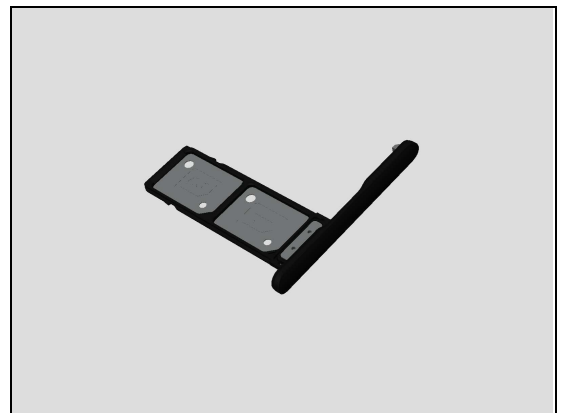


**Check:**

Inspect the SIM card holder on Main PBA.

**Action:**

1. If dirty or clogged – clean the holder.
2. Replace Main PBA.

**Note: only Dual SIM illustration shown!**

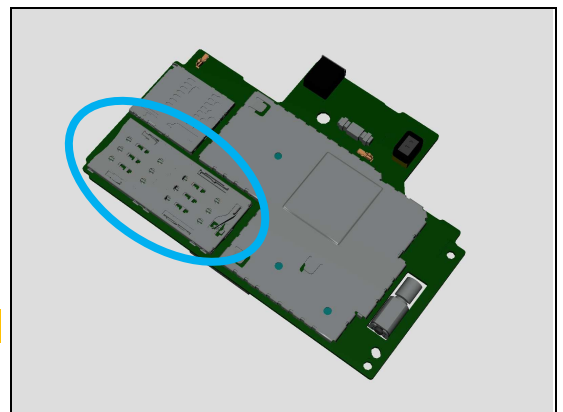

#### 1.29.2 Incorrect Nano SIM indicated

**Check:**

Check whether the phone is locked to a particular operator and whether the correct operator Nano SIM is being used.

**Action:**

1. Use a proper operator Nano SIM or test Nano SIM.
2. Replace Main PBA.



## Problem Areas

### 1.30 Charging

#### 1.30.1 Battery will not charge by USB connector

**Check:**


Inspect the USB connector.

**Action:**

1. If dirty or oxidized – clean the connector.



2. If USB connector is damaged – replace Sub PBA Assy.

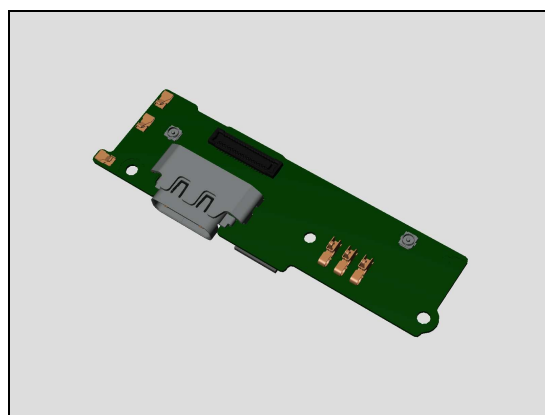


**Check:**

Inspect the BtB connector of Sidekey FPC Assy to Sub PBA Assy.


**Action:**

1. If not properly connected – disconnect and reconnect it.

2. If dirty or oxidized – clean it.

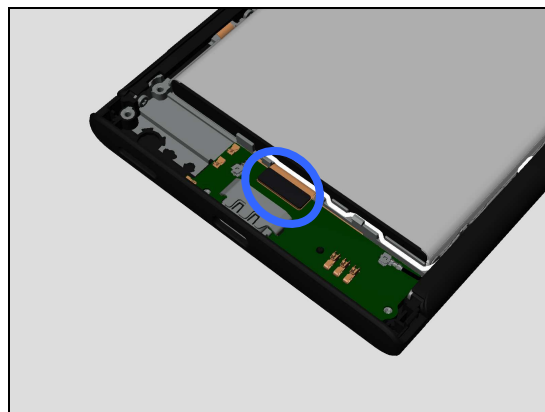


3. If Sub PBA Assy is damaged – replace it.

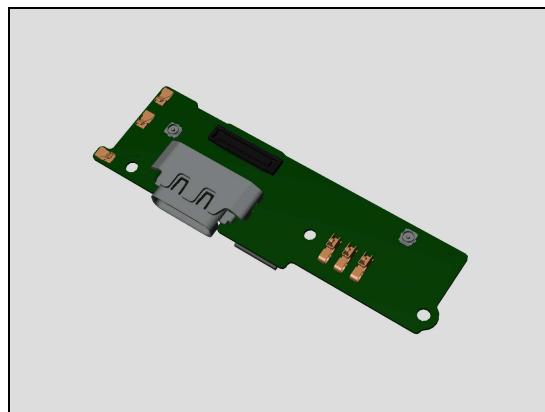

## Problem Areas: Charging

3. If the Sidekey FPC Assy is damaged – replace it.

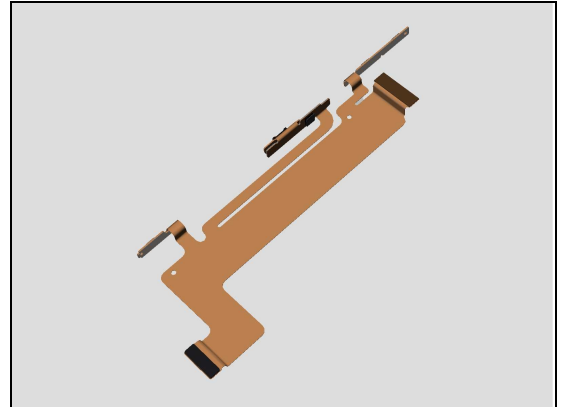


### Check:


Inspect the BtB connector of Sidekey FPC Assy to Main PBA.

### Action:

1. If not properly connected – disconnect and reconnect it.
2. If dirty or oxidized – clean it.

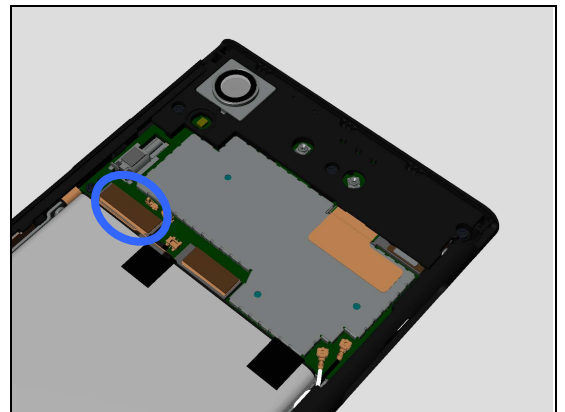

3. If the Sidekey FPC Assy is damaged – replace it.
4. Replace the Main PBA.

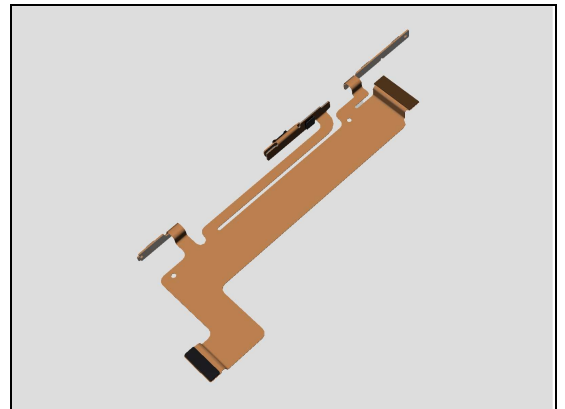


### Check:

Inspect the Battery connector to Main PBA.


### Action:

1. If not properly connected – disconnect and reconnect it.
2. If dirty or oxidized – clean the both sides of the BtB connector.

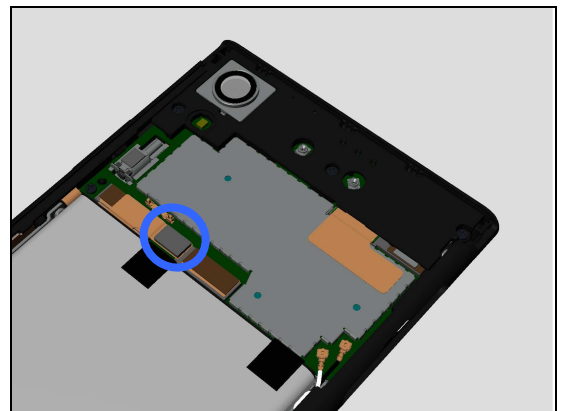

## Problem Areas: Charging

3. If the BtB connector, the FPC or the Battery is damaged – replace the Battery.
4. Replace Main PBA.

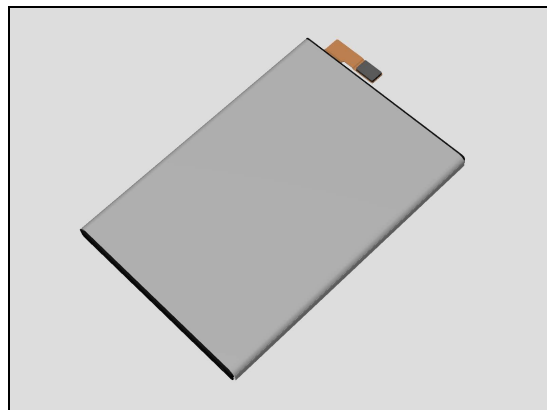

## Problem Areas

### 1.31 Audio Jack

#### 1.31.1 Connection to headset fails

**Check:**

Inspect the external port of the Audio Jack FPC Assy.

**Action:**

1. If dirty or oxidized – clean it.




**Check:**


Inspect the BtB connector of Audio Jack FPC Assy to Main PBA.

**Action:**

1. If not properly connected – disconnect and reconnect it.
2. If dirty or oxidized – clean it.

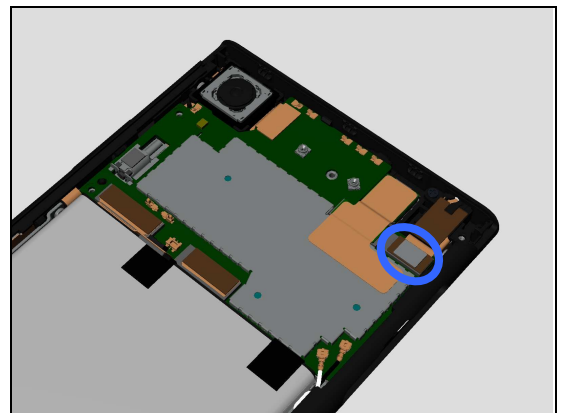

3. If the Audio Jack FPC Assy is damaged – replace the Audio Jack FPC Assy.
4. Replace Main PBA.

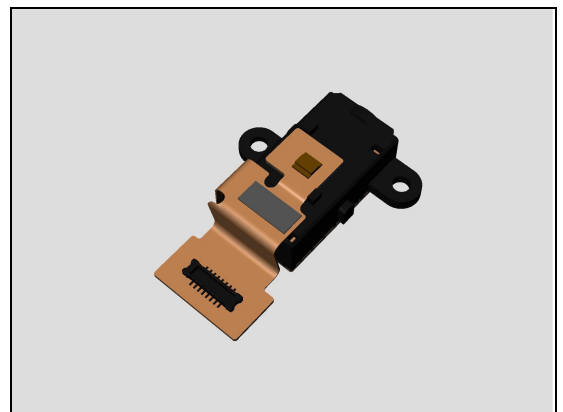

## Problem Areas

### 1.32 Data Communication

#### 1.32.1 Data transfer via System Connector fails

**Check:**


Inspect the USB connector.

**Action:**

1. If dirty or oxidized – clean the connector.



2. If USB connector is damaged – replace Sub PBA Assy.

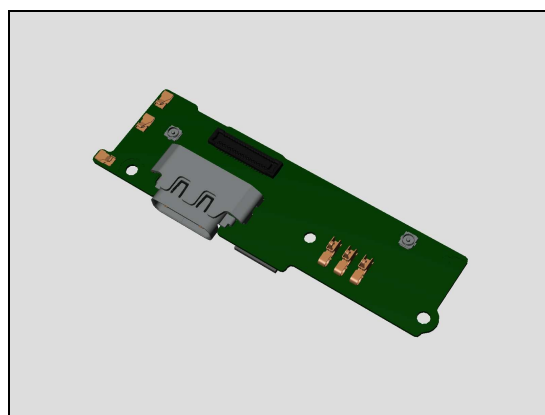


**Check:**

Inspect the BtB connector of Sidekey FPC Assy to Sub PBA Assy.


**Action:**

1. If not properly connected – disconnect and reconnect it.

2. If dirty or oxidized – clean it.

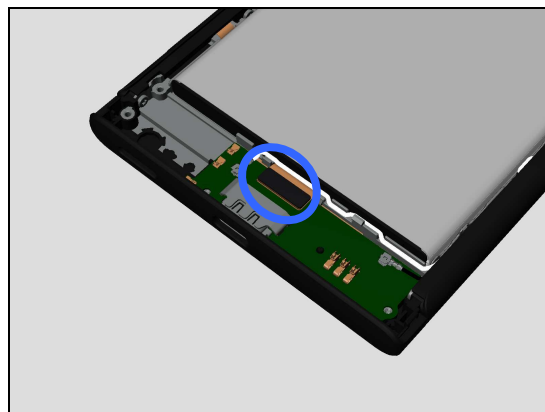

3. If Sub PBA Assy is damaged – replace it.

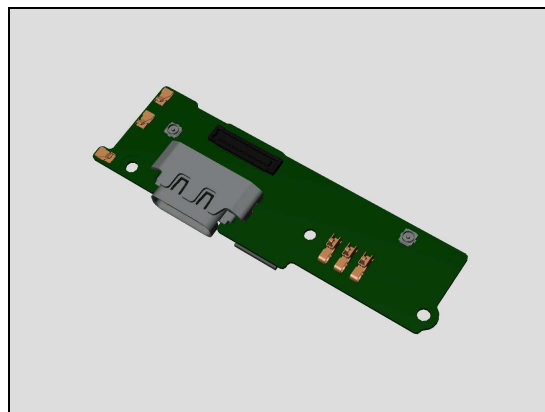

## Problem Areas: Data Communication

3. If the Sidekey FPC Assy is damaged – replace it.




### Check:

Inspect the BtB connector of Sidekey FPC Assy to Main PBA.

### Action:

1. If not properly connected – disconnect and reconnect it.
2. If dirty or oxidized – clean it.

3. If the Sidekey FPC Assy is damaged – replace it.
4. Replace the Main PBA.

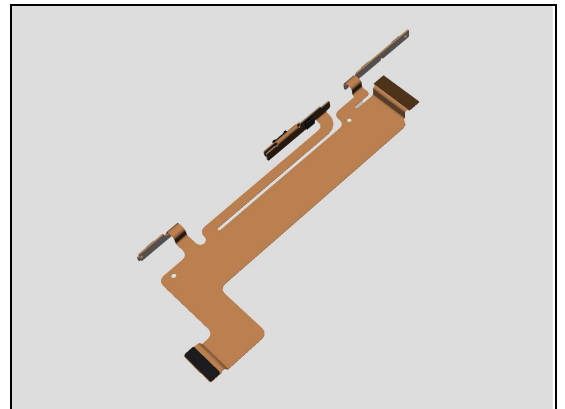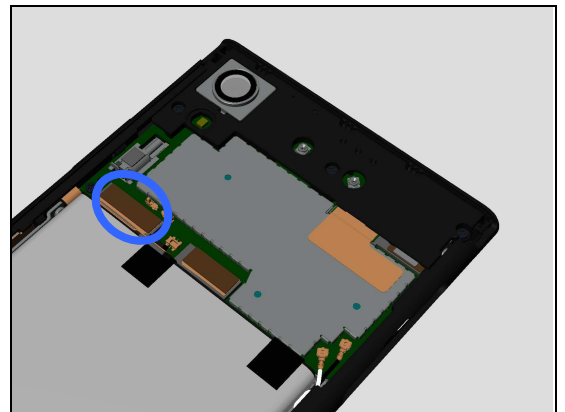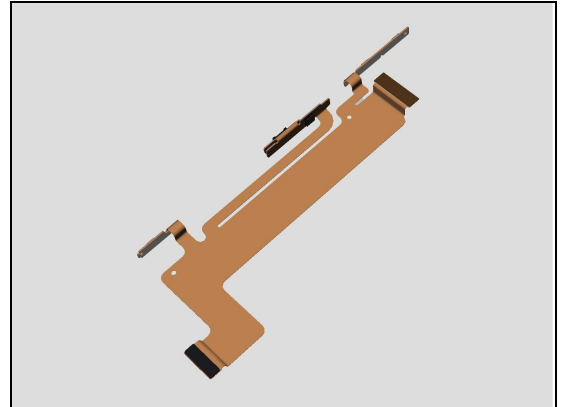

## Problem Areas

### 1.33 Fingerprint

#### 1.33.1 Fingerprint function fails

**Check:**

Inspect the external area of the finger print sensor area.

**Action:**

1. If dirty – clean it.

2. If damaged – replace the FP Module Assy.

**Check:**

Inspect the BtB connector of Sidekey FPC Assy to Main PBA.





**Action:**

1. If not properly connected – disconnect and reconnect it.

2. If dirty or oxidized – clean it.

3. If the Sidekey FPC Assy is damaged – replace it.

4. Replace Main PBA.

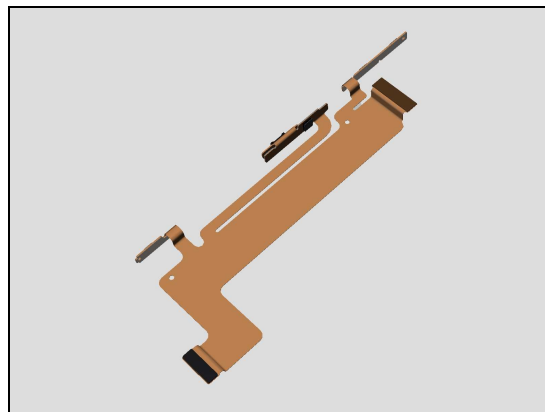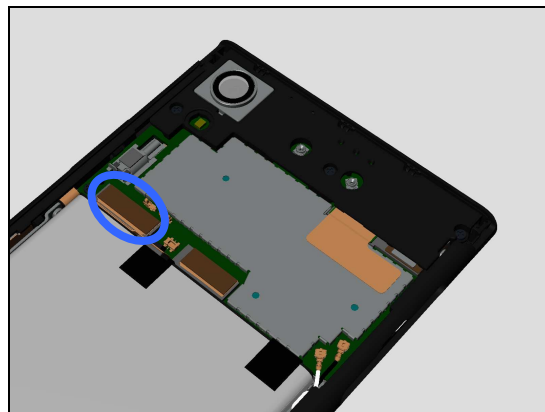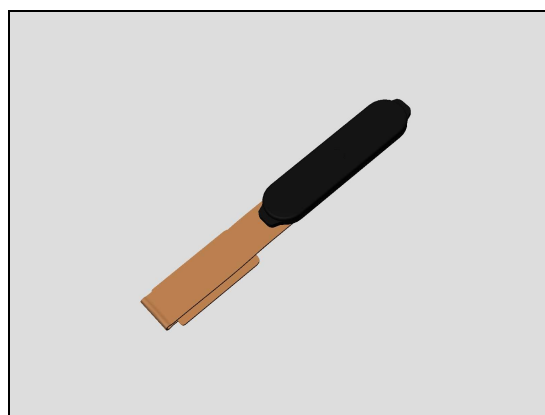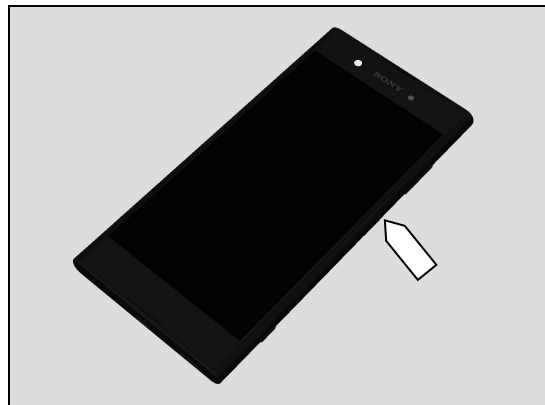


## Problem Areas: Fingerprint

### Check:


Inspect the BtB connector of FP Module Assy to Sidekey FPC Assy.

### Action:


1. If not properly connected – disconnect and reconnect it.
2. If dirty or oxidized – clean it.

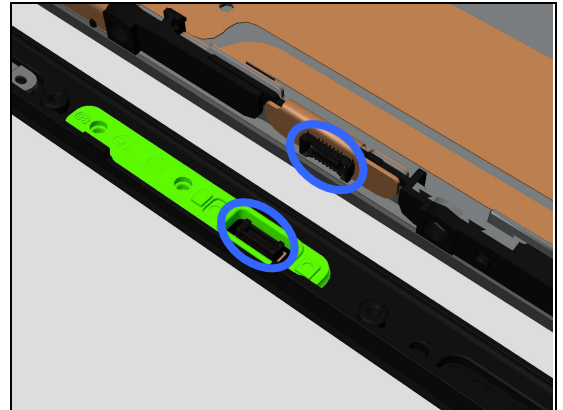

2. If the FP Module Assy is damaged – replace it.

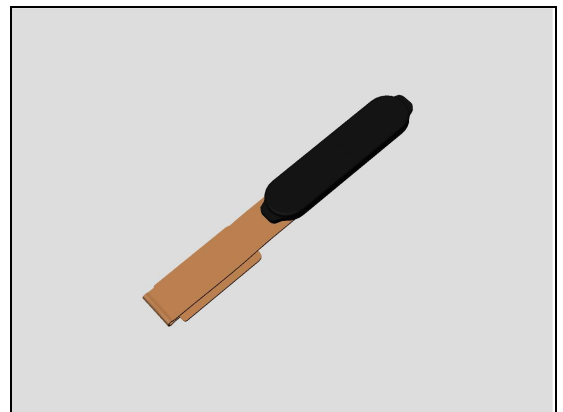

3. If the Sidekey FPC Assy is damaged – replace it.

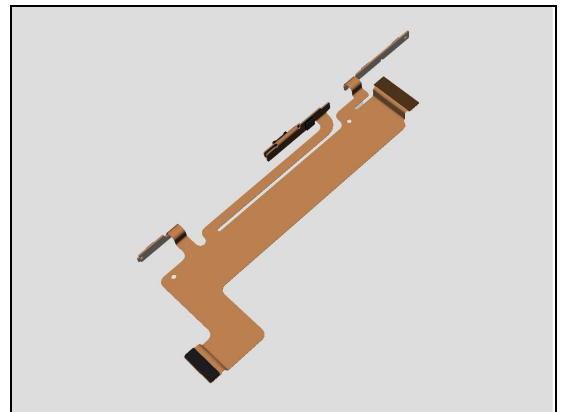

## 2 Revision History

Rev.	Date	Changes / Comments
1	2017-Sept-22	Initial release