


# Go/No Go Test

- electrical -

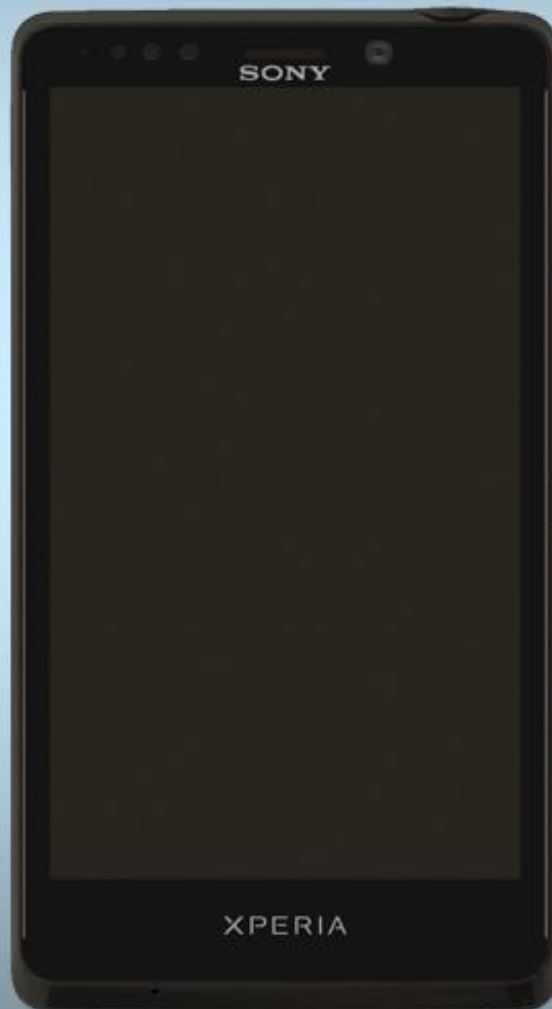

*Xperia™* T  
*LT30p*

CONTENTS

1 Go/No Go Testing ..... 3

1.1 Antenna Coupler ..... 3

1.2 Direct Line ..... 4

1.3 Attenuation Factors ..... 6

1.3.1 Loss Values – Antenna Coupler ..... 6

1.3.2 Loss Values – Direct Line ..... 7

2 Revision History ..... 8

*This product is ONLY implemented in SERPII.*

## 1 Go/No Go Testing

This Go/No Go testing has to be carried out in two ways, with an:

- Antenna Coupler.
- Cable in shield box.

**For more information on Antenna Coupler and Cable in shield box testing, refer to 1220-1336: Generic Repair Manual – electrical, section ‘Setup Go/NoGo Test’!**

**For part no's on the equipment below, refer to the ‘Tools Catalogue/Matrix’!**

### 1.1 Antenna Coupler


The following equipment has to be used:

- Rohde & Schwartz RF Shield Package
  - Rohde & Schwartz RF Shield Box CMU-Z11
  - Rohde & Schwartz RF Coupler
  - Grid Positioning Holder
- RF Test Cable Flexible 1M
- RF Adapter for RF Shield Box
- Micro USIM Card, instrument specific

**GSM-850/900/1800/1900**

**WCDMA-850/900/1700/1900/2100**

Put the grid positioning holder with its reference point in position **F12** and place the phone as shown in the adjacent picture.

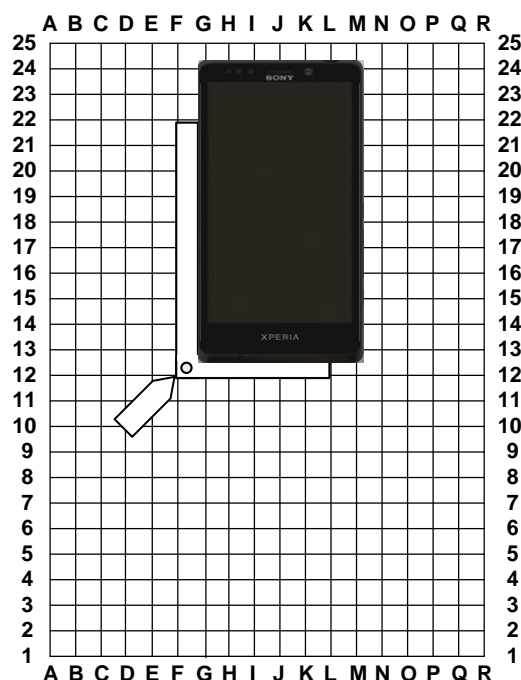

## Go/NoGo Testing

### 1.2 Direct Line

The following equipment has to be used:

- RF Test Cable Flexible 1M
- RF Probe
- Micro USIM Card, instrument specific.

Connect the RF Probe as shown in the adjacent picture.

**To get access to the RF connector on the PBA, refer to 1261-8566: LT30 Mechanical Working Instructions, Chapter 3.1!**



## Go/NoGo Testing

***Follow the directions stated in 'Go/NoGo Test Script Parameters' to be found in 1220-1336: Generic Repair Manual – electrical, together with the 'Attenuation Factors' below!***

This phone is available in one version, LT30p, including the following bands:

**LT30p:**

GSM-850/900/1800/1900

WCDMA-850/900 /1700 /1900 /2100

## Go/NoGo Testing

### 1.3 Attenuation Factors

*The attenuation values listed below in 1.3.1 and 1.3.2 is valid only when the equipment listed on the previous pages is being used!*

#### 1.3.1 Loss Values – Antenna Coupler

Band	Channel	Attenuation LT30p	
		Rx	Tx
GSM 850	Low	7.00	12.84
	Mid	6.00	9.66
	High	9.00	7.74
GSM 900	Low	6.50	7.19
	Mid	6.50	7.81
	High	6.50	8.74
GSM 1800	Low	16.50	17.05
	Mid	15.00	13.55
	High	15.00	12.94
GSM 1900	Low	15.00	15.47
	Mid	16.00	18.54
	High	16.00	16.13
WCDMA 850	Low	7.50	9.22
	Mid	8.00	8.01
	High	8.50	7.96
WCDMA 900	Low	11.00	6.48
	Mid	10.50	6.86
	High	10.00	6.33
WCDMA 1700	Low	14.50	16.06
	Mid	13.50	14.23
	High	14.00	13.16
WCDMA 1900	Low	15.00	16.26
	Mid	17.00	16.80
	High	16.50	17.45
WCDMA 2100	Low	15.00	16.02
	Mid	14.50	17.06
	High	15.00	18.70

## Go/NoGo Testing: Attenuation Factors

### 1.3.2 Loss Values – Direct Line

Band	Channel	Attenuation	
		Rx	Tx
GSM 850	All	1.0	1.0
GSM 900	All	1.0	1.0
GSM 1800	All	2.3	2.3
GSM 1900	All	2.3	2.3
WCDMA 850	All	2.5	2.5
WCDMA 900	All	2.5	2.5
WCDMA 1700	All	1.3	1.3
WCDMA 1900	All	1.3	1.3
WCDMA 2100	All	1.3	1.3

## 2 Revision History

Rev.	Date	Changes / Comments
1	2012-Sep-13	Initial release